

Specifications:

- ➔ Metal construction
- ➔ Pressure balancing volume control with 3-way, two handle diverting
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid F1003B or F1023B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001TMB	Sleeve Tube and Cap
FP6016041MB	Quad Handle
FP801013MB	Diverter Sleeve
FP605752MB	Diverter Handle
FP6001143MB-3PB	Square Cover Plate
FP6021308MB	3" Ceiling Shower Arm
FP6001150MB	8" Square Rain Showerhead
FP6027008MB	8" Shower Arm
FP6000150MB	6" Showerhead
FP6001007MB	60" Shower Hose
FA803MB	Slide Bar With Integral Outlet
FP40130MB	3-Function Hand Shower

**sharing available where allowed by code

Kit with Alternate Handle: **F163036TMB-AS**

**Features:**

 Requires 3-way diverting F1003B or F1023B valve

 Integral Stops  Bubble Level

 Speed Connect

Quad Double Showerhead and 3-Function Hand Shower Trim Kit


F163036TMB



Matte Black (MB)

Technical Drawing

F163036TMB

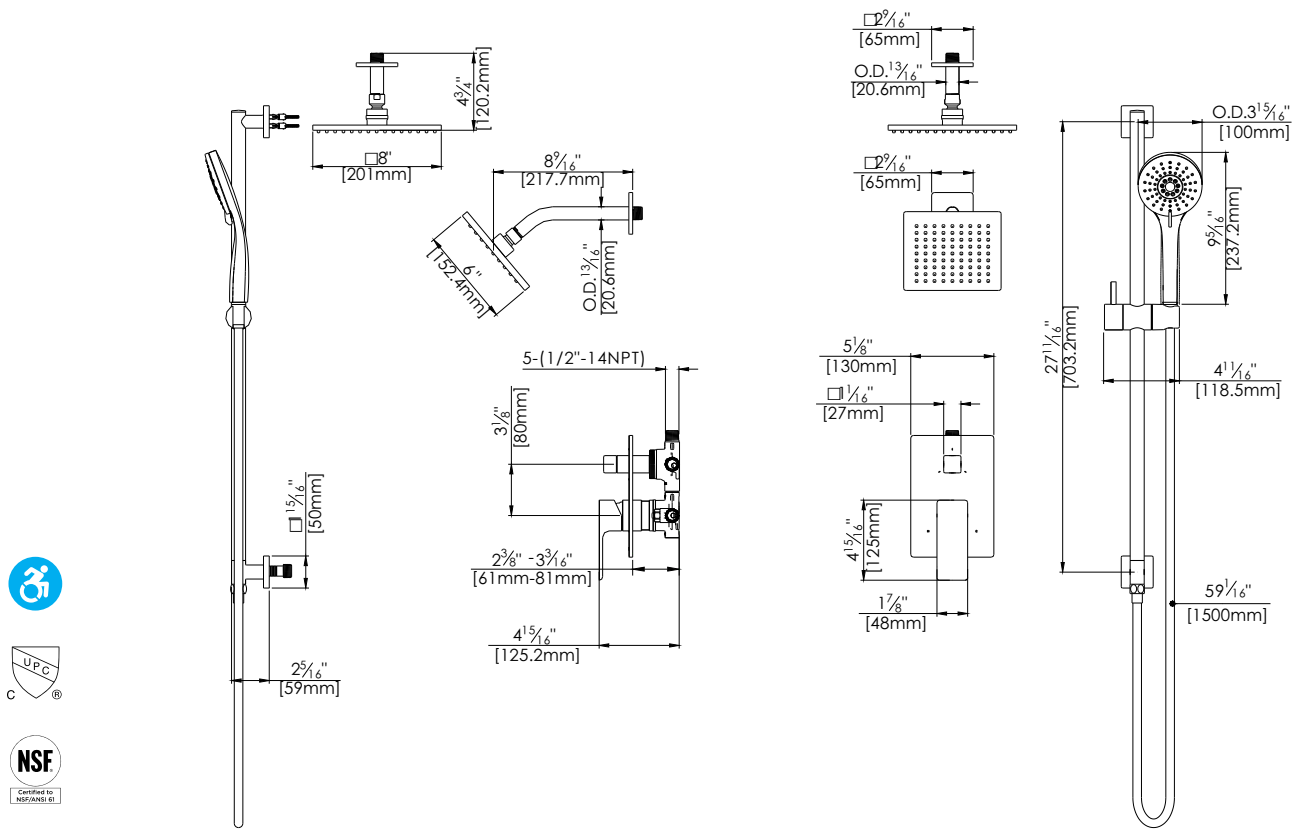

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1
CSA B125.1
IAPMO / cUPC Listed
ADA Compliant

Flow Rate:

Showerheads 1.8 gpm @ 60 psig
Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower & Showerhead @ 1.5 gpm:

F163036TMB-15