fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 3-way, two handle diverting
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → ADA compliant with Alternate Handle below
- → Requires the fluid F1003B or F1023B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001TMB	Sleeve Tube and Cap
FP6028341MB	•
FP801013MB	Diverter Sleeve
FP605752MB	Diverter Handle
FP6001142MB-3PB	Cover Plate
FP6006008MB	16" Shower Arm
FP6002150MB	8" Rain Showerhead
FP40130MB	3-Function Hand Shower
FA802MB	Slide Bar With Integral Outlet
FP6001007MB	60" Shower Hose
FP6057034MB	Pipe Tub Spout

**sharing available where allowed by code

Kit with Alternate Handle: F283029T-ABS-AR





Features:







Bubble Level



Speed Connect

Wisdom Tub, 3-Function Hand Shower and 8" Rain Shower Kit

F283029TMB





Matte Black (MB)

fluid

Technical Drawing

F283029TMB

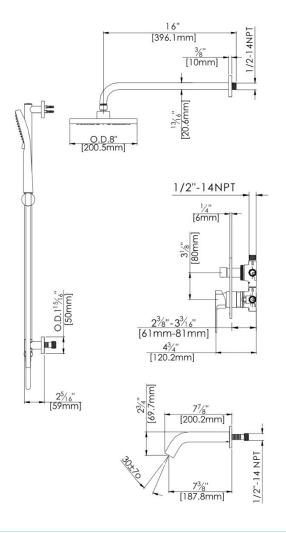

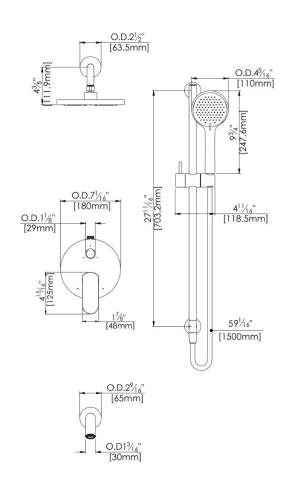

Warranty:

NSF.

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant (with ADA handle)

Flow Rate:

Showerhead 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Shower & Hand Shower & @ 1.5 gpm: **F283029TMB-15**