

Specifications:

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing volume control with 3-way two handle diverting
- ➔ Max-temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ ADA compliant with alternate handle below
- ➔ Requires the fluid F1023B or the F1003B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001T	Cartridge Sleeve
FP6024041	Blade Handle
FP801013	Diverter Sleeve
FP605752	Diverter Handle
FP6001142-3PB	Round Cover Plate
FP6018008	6" Ceiling Shower Arm
FP6002150	8" Shower Head
FP40120	3-Function Hand Shower
FA802	Slide Bar With Integral Outlet
FP6001006	60" Shower Hose
FP6057034	8" Pipe Tub Spout

**sharing available where allowed by code

Kit with Alternate Handle: **F243009T-AR**



Features:



Requires 3-way diverting F1003B or F1023B valve



Integral Stops



Bubble Level



Speed Connect

Citi Tub, 8" Ceiling Rain Shower & 3 Function Hand Shower Trim Kit


F243009T



Polished Chrome (CP) and Brushed Nickel (BN)

Technical Drawing

F243009T

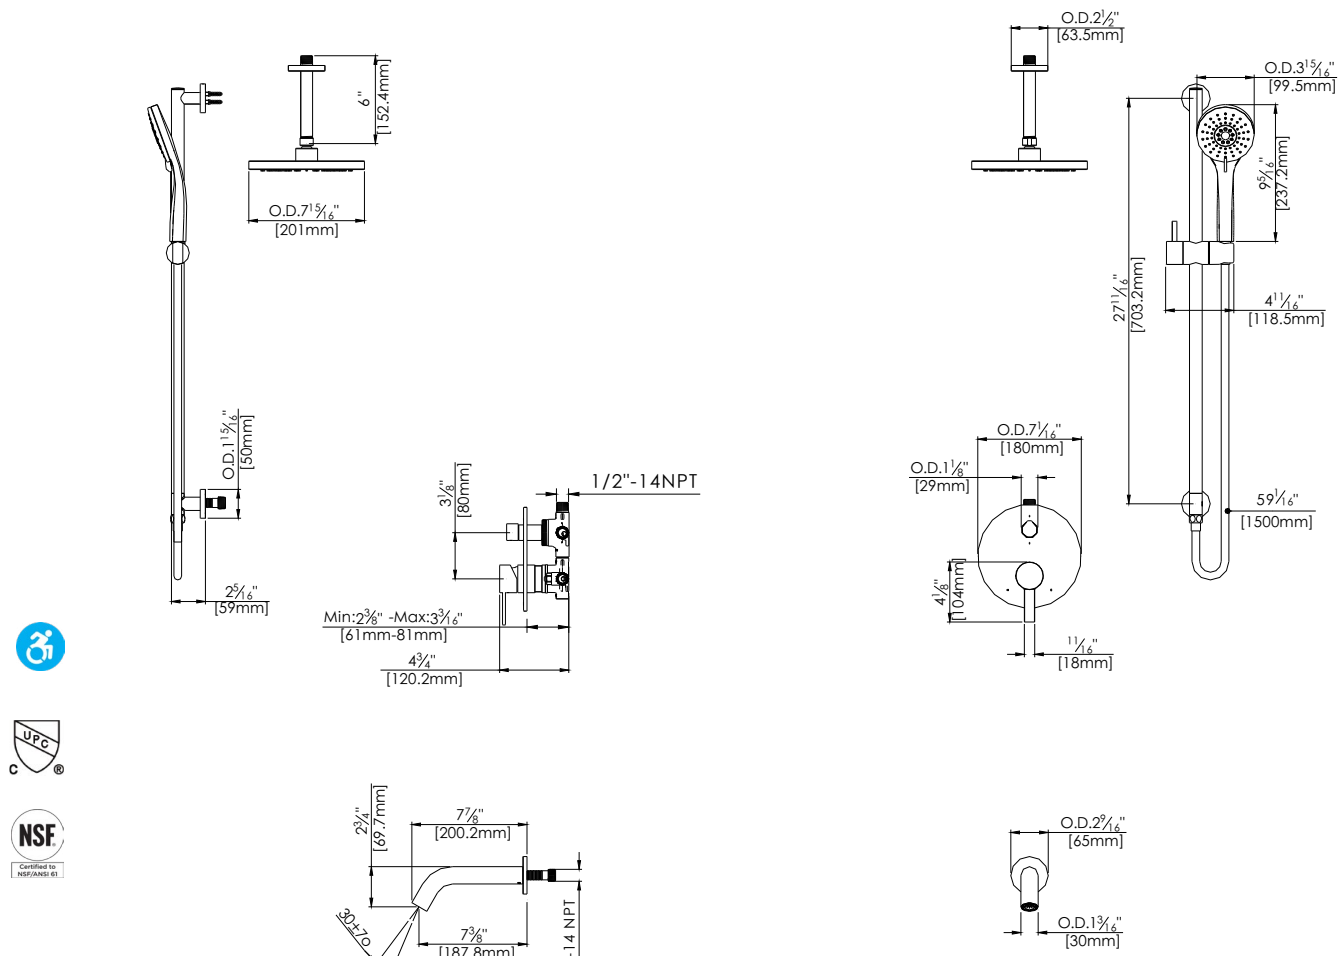

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle:

F243009T-AR

Kit with square style cover plate & diverter handle: **F243009T-S**

Flow Rate:

Shower Head 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Tub spout 4.5 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F243009T-15**