

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 3-way two handle diverting
- → Maximum temperature limit stop for added safety
- > Integral stop check valves for easy maintenance
- → ADA compliant with altarnate handle below
- → Requires the fluid F1023B or 1003B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001TMB	Cartridge Sleeve
FP6024041MB	Blade Handle
FP801013MB	Diverter Sleeve
FP605752MB	Diverter Handle
FP6001142-3PB	Round Cover Plate
FP6016008MB	8" Shower Arm
FP6000350MB	6" Shower Head
FP40120MB	3-Function Hand Shower*
FA802MB	Slide Bar With Integral Outlet
FP6001006MB	60" Shower Hose*
FP6057034MB	8" Pipe Tub Spout

**sharing available where allowed by code

Kit with Alternate Handle: **F243027TMB-**





Features:



Requires 3-way diverting F1003B or F1023B valve



Integral Stops



Bubble Level



Speed Connect

Citi Tub, 6" Shower & 3 Function Hand Shower Trim Kit

F243027TMB



Matte Black (MB)

F243027TMB October 2025

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com


Toll free: 1-800-460-7019




fluid

Technical Drawing

F243027TMB

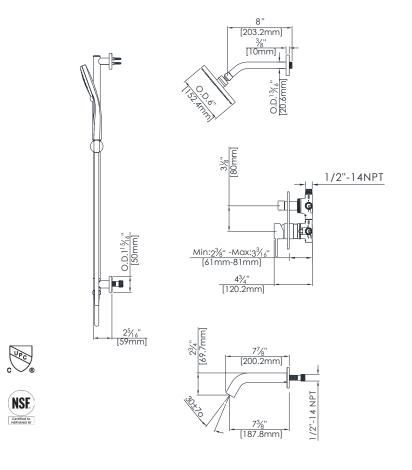

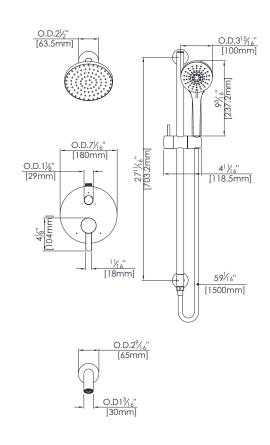

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1,

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle:

F243027TMB-AR

Kit with square style cover plate & diverter handle: **F243027TMB-S**

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig Tub spout 4.5 gpm @ 60 psig

Low Flow Alternative: Shower Head & Hand Shower @ 1.5 gpm: **F243027TMB-15**

F243027T MB October 2025

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com

Toll free: 1-800-460-7019

