

Specifications:

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing volume control with 3-way, two handle diverting
- ➔ Max-temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid F1003B or F1023B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve tube and cap
FP6018041	Utopia Handle
FP801013	Diverter Sleeve
FP605752	Diverter Handle
FP6001142-3PB	Round Cover Plate
FP6018008	6" Ceiling Shower Arm
FP6002150	8" Round Rain Showerhead
FP40120	3-Function Hand Shower
FA802	Slide Bar With Integral Outlet
FP6001006	60" Shower Hose
FP6031034	Utopia Tub Spout

**sharing available where allowed by code

Kit with Alternate Handle: **F183009T-ABS-AR**

**Features:**

 Requires 3-way diverting F1003B or F1023B valve

 Integral Stops

 Bubble Level

 Speed Connect

Utopia Tub, 8" Ceiling Rain Shower & Hand Shower Trim Kit


F183009T-ABS



Polished Chrome (CP) and Brushed Nickel (BN)

Technical Drawing

F183009T-ABS

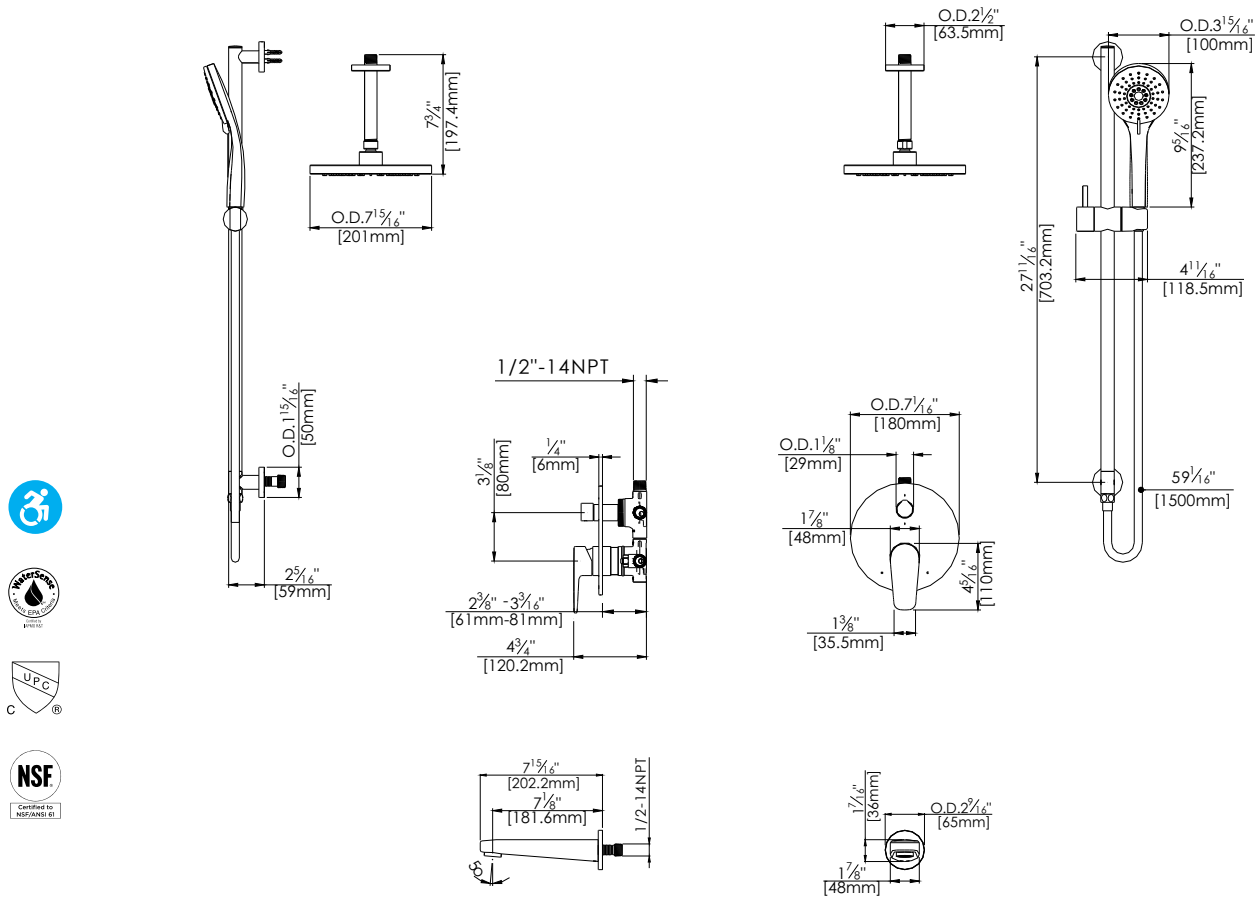

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

EPA Watersense Listed

ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Tub spout 4.5 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F183009T-ABS-15**