

Specifications:

- → Metal construction for durability and reliability
- → Pressure balancing volume control
- → Maximum temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- Requires the fluid™F1001B or F1021B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:


F1001T	. Cartridge Sleeve
FP6019041	. Yaletown Handle
FP6001035-1PB	. Cover Plate
FP900208	.8" Switch Shower Arm
FP20100	.5-Function Showerhead
FP40120	. 3-Function Round Hand Shower*
FP933000	. Switch Slide Bar
FP6001006	. 60" Shower Hose*

Matte Black kits feature the FP6001007MB Shower Hose & FP40130MB 3-Function Hand Shower

Features:







Speed Connect

Yaletown Switch Showerhead & 3-Function Hand Shower Kit

F191013T



Polished Chrome (CP), Brushed Nickel (BN) and *Matte Black (MB)

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com


Toll free: 18004607019



fluid[™]

Technical Drawing

F191013T

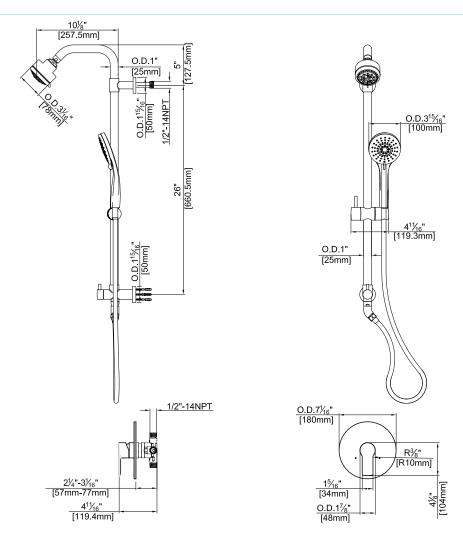







Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Showerhead & Hand Shower @ 1.5 gpm: **F191013T-15**

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com

Toll free: 18004607019

