

Yaletown 3-Function Hand Shower on Slide Bar

F191019T

Specifications:

- Metal construction for durability and reliability
- Pressure balancing volume control
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Requires the fluid™ F1001B or F1021B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX)

Components:

F1001T Cartridge Sleeve
FP6019041 Yaletown Handle
FP6001035-1PB Round Cover Plate
FP40120 3-Function Hand Shower*
FA802 Slide Bar with Integral Outlet
FP6001006 60" Shower Hose*

* Matte Black kits feature the FP6001007MB Shower Hose & FP40130MB 3-Function Hand Shower

Features:

 Requires non-diverting F1001B or F1021B valve

 Integral Stops  Bubble Level


 Speed Connect

Polished Chrome (CP), Brushed Nickel (BN) & Matte Black (MB)



Technical Drawing

F191019T

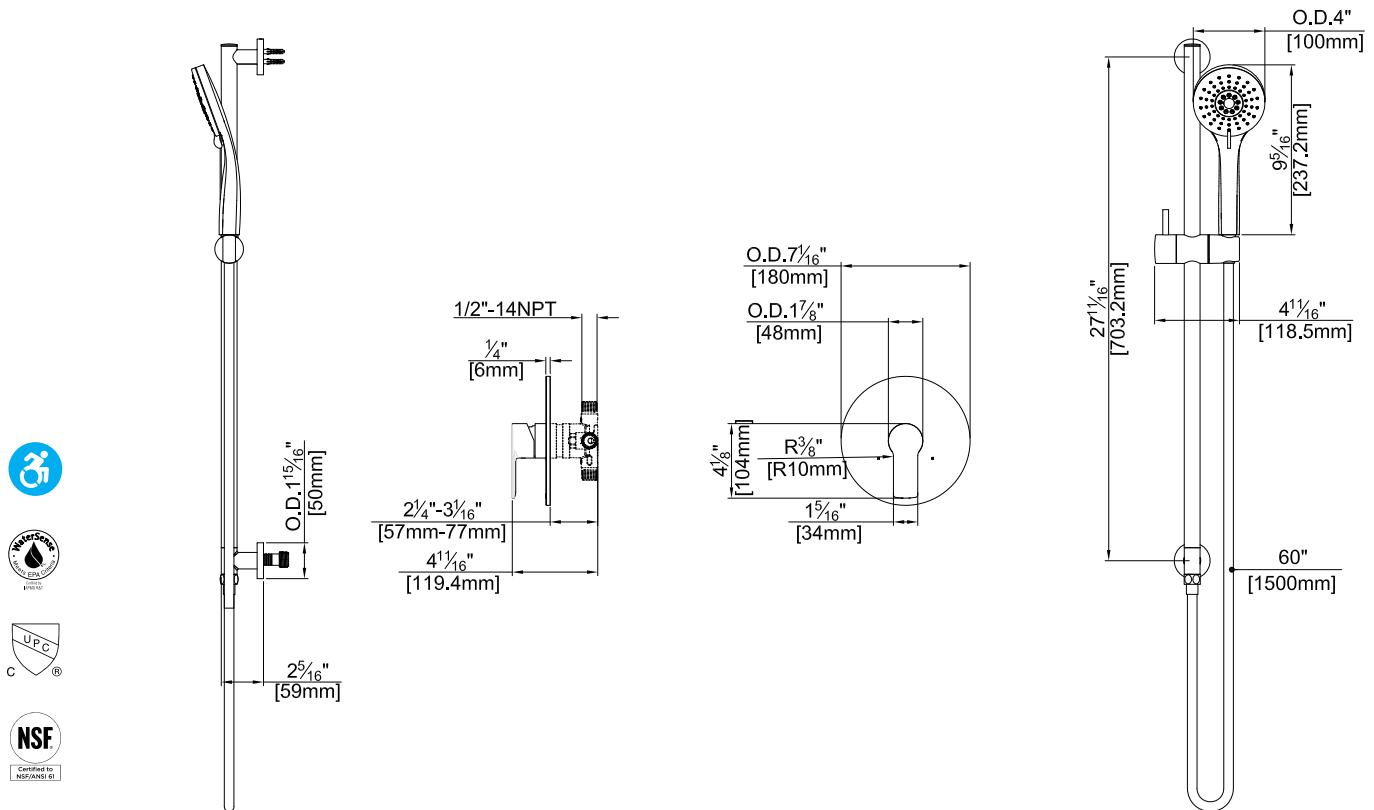

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1
CSA B125.1
IAPMO / cUPC Listed
EPA Watersense Listed (excluding MB Version)
ADA Compliant

Flow Rate:

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower
@ 1.5 gpm: **F191019T-15**