

## **Specifications:**

- → Metal construction for durability and reliability
- → Pressure balancing volume control
- → Maximum temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- Requires the fluid™F1001B or F1021B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX.)

#### **Components:**

F1001T	Cartridge Sleeve
FP6019041	Yaletown Handle
FP6001035-1PB	Round Cover Plate
FA101	Slide Rail
FP6082048	Round Wall Outlet
FP40120	3-Function Hand Shower*
FP6001006	60" Shower Hose*
FP6055034	Round Diverting Tub Spout

 Matte black uses an FP6001007MB Shower Hose & FP40130MB Round Hand Shower

# Yaletown Hand Shower on Slide Rail Trim Kit

F191239T



#### **Features:**



Requires non-diverting F1001B or F1021B valve



Integral Stops



Bubble Level



Speed Connect

Polished Chrome (CP), Brushed Nickel (BN), & Matte Black (MB)

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com


**Toll free:** 1 800 460 7019





## **Technical Drawing**

## F191239T

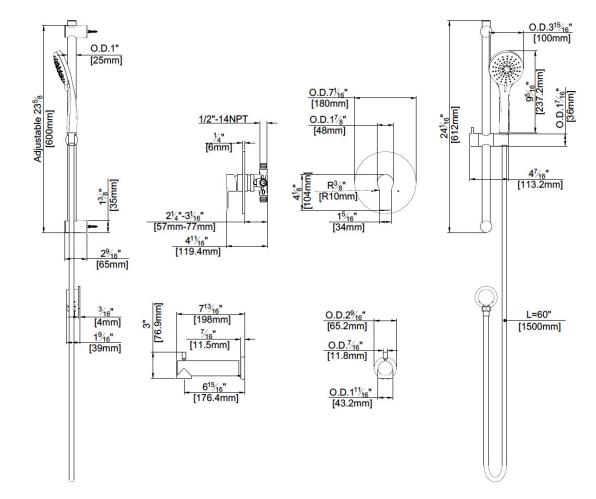

### **Warranty:**

NSF.

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

#### **Codes and Standards:**

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed EPA Watersense Listed ADA Compliant

#### Flow Rate:

Hand Shower 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F191239T-15** 

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com

Toll free: 18004607019

