

Specifications:

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing volume control with 2-way, two handle diverting
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid™ F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:

F1001T	Cartridge Sleeve
FP6019041	Yaletown Handle
FP801013	Diverter Sleeve
FP605652	Diverter Handle
FP6001142-2PB	Cover Plate
FP6016008	8" Shower Arm
FP10200	4" Eco Showerhead
FP6001048	Round Hand Shower*
FA105	Slide Bar
FP6002047	Wall Outlet
FP6001006	60" Shower Hose*

**sharing available where allowed by code

Kit with Alternate ADA Diverter Handle: **F192012TCP-AR**



Yaletown 4" Eco Shower & Hand Shower Trim Kit with Slide Bar

F192012TCP



Features:

 Requires 2-way diverting F1012B or F1022B valve

 Integral Stops  Bubble Level


 Speed Connect

* Matte black uses an FP6001007MB Shower Hose & FP6006048MB Round Hand Shower

Polished Chrome (CP), Brushed Nickel (BN) & Matte Black (MB)

Technical Drawing

F192012TCP

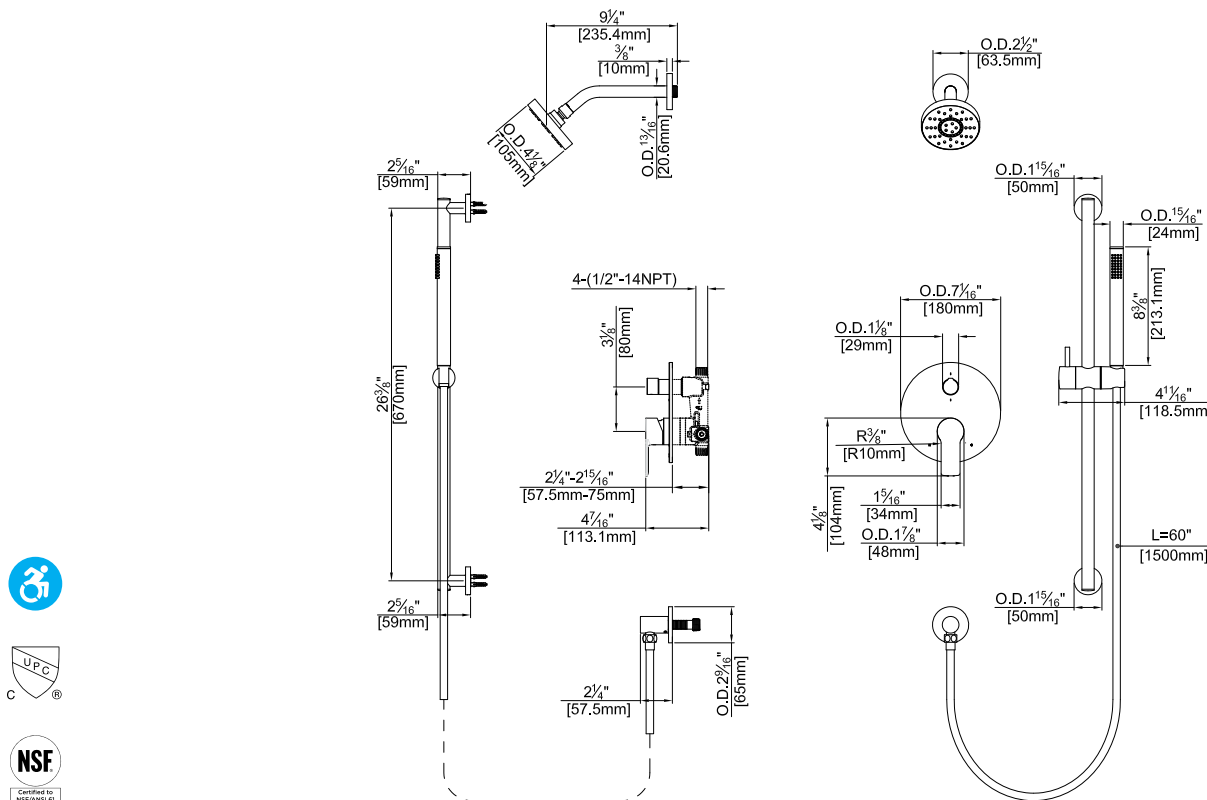

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed, ADA Compliant

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle:

F192012TCP-AR

Kit with square style cover plate & diverter handle: **F192012TCP-S**

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Shower-head & Hand Shower @ 1.5 gpm:

F192012TCP-15