

Specifications:

- → Metal construction for durability and reliability
- → Pressure balancing volume control with 2-way, two handle diverting
- → Maximum temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Requires the fluid^{™™} F1012B or F1022B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX)

Components:

| F1001T | Cartridge Sleeve |
|---------------|--------------------------------|
| FP6019041 | Yaletown Handle |
| FP801013 | Diverter Sleeve |
| FP605652 | Diverter Handle |
| FP6001142-2PB | Round Cover Plate |
| FP40120 | 3-Function Hand Shower* |
| FA802 | Slide Bar with Integral Outlet |
| FP6001006 | 60" Shower Hose* |
| FP6057034 | Pipe Tub Spout |

* Matte Black kits feature the FP6001007MB Shower Hose & FP40130MB 3-Function Hand Shower

Kit with Alternate ADA Diverter Handle: F192074T-AR





Yaletown Tub & 3-Function Hand Shower on Slide Bar Trim Kit

F192074T



Features:







Bubble Level

Speed Connect

Polished Chrome (CP), Brushed Nickel (BN) and Matte Black (MB)

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com


Toll free: 1 800 460 7019





Technical Drawing

F192074T

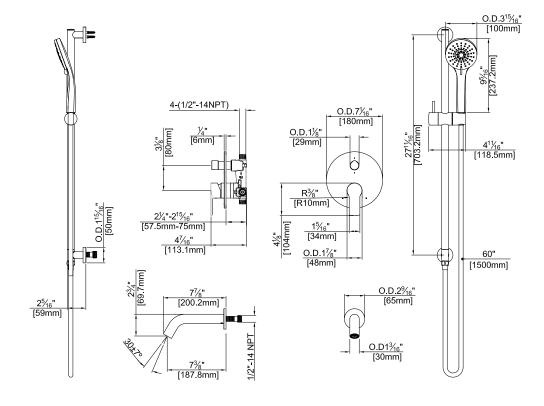

Codes and Standards:

ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed, EPA Watersense Listed (excluding MB Version), ADA Compliant

Warranty:

NSF.

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle:

F192074T-AR

Kit with square style cover plate & diverter handle: **F192074T-S**

Flow Rate:

Hand Shower 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F191019T-15**

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com

Toll free: 1 800 460 7019

