

Specifications:

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing volume control with 2-way diverter
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid™ F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or **sharing, in solder, PEX or PEX-W, F1960 Expansion PEX.)

Components:

F1001T	Sleeve Tube and Cap
FP801013	Diverter Sleeve
FP6001142-2PB	Round Cover Plate
FP605652	Round Diverter Handle
FP6019041	Yaletown Handle
FP6006008	16" Shower Arm
FP6002150	8" Round Rain Showerhead
FP6001048	Round Hand Shower*
FP6001010	Hand Shower Holder
FP6002047	Brass Wall Outlet
FP6001006	60" Shower Hose*

**sharing available where allowed by code

Kit with Alternate ADA Diverter Handle: **F192201T-ABS-AR**



Features:



Requires 2-way diverting F1012B or F1022B valve



Integral Stops



Bubble Level



Speed Connect

Yaletown Rain Showerhead & Hand Shower Wand Trim Kit

F192201T-ABS




* Matte black uses an FP6001007MB Shower Hose & FP6006048MB Round Shower Wand

Polished Chrome (CP), Brushed Nickel (BN) & Matte Black (MB)

Technical Drawing

F192201T-ABS

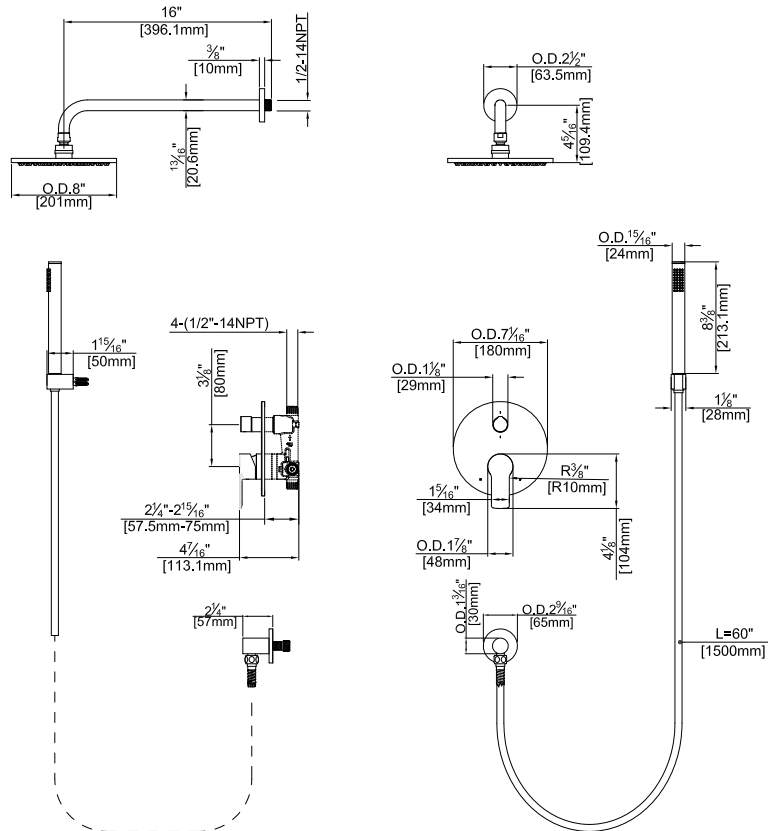

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO/cUPC Listed, ADA Compliant

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle:

F192201T-ABS-AR

Kit with square style cover plate & diverter handle: **F192201T-ABS-S**

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F192201T-ABS-15**