

Specifications:

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing volume control with 3-way, two handle diverting
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid™ F1003B or F1023B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:

F1001T	Cartridge Sleeve
FP6019041	Yaletown Handle
FP801013	Diverter Sleeve
FP605752	Diverter Handle
FP6001143-3PB	Square Cover Plate
FP6018008	6" Ceiling Shower Arm
FP6002150	8" Round Rain Showerhead
FP40120	3-Function Hand Shower*
FA802	Slide Bar With Integral Outlet
FP6001006	60" Shower Hose*
FP6095035	Slimline Tub Spout

**sharing available where allowed by code

Kit with Alternate ADA Diverter Handle: **F193009T-ABS-AS**



Features:



Requires 3-way diverting F1003B or F1023B valve



Integral Stops



Bubble Level



Speed Connect

Yaletown Tub, Ceiling Shower & Hand Shower on a Slide Bar

F193009T-ABS




- * Matte black uses an FP6001007MB Shower Hose & FP40130MB Round Hand Shower

Polished Chrome (CP), Brushed Nickel (BN), & Matte Black (MB)

Technical Drawing

F193009T-ABS

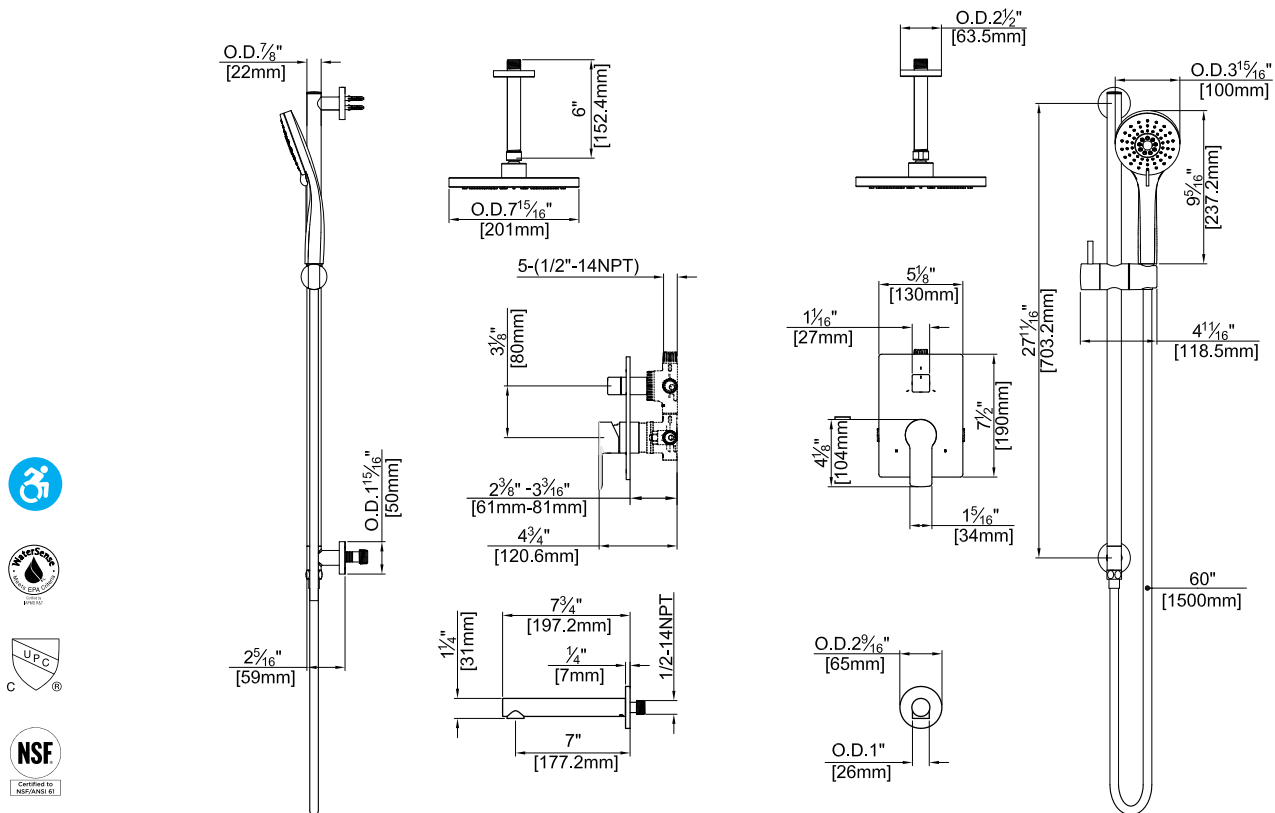

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO/cUPC Listed, EPA Watersense Listed, ADA Compliant

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle:

F193009T-ABS-AS

Kit with round style cover plate & diverter handle: **F193009T-ABS-R**

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Tub spout 4.5 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F193009T-15**