fluid™

fixtures for life.

Yaletown Double Showerhead & Hand Shower Trim Kit

F193036T-ABS

Specifications:

- Metal construction for durability and reliability
- Pressure balancing volume control with 3-way, two handle diverting
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Requires the fluid™ F1003B or F1023B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:

F1001T	Cartridge Sleeve
FP6019041	Yaletown Handle
FP801013	Diverter Sleeve
FP605752	Diverter Handle
FP6001143-3PB	Square Cover Plate
FP6018308	3" Ceiling Shower Arm
FP6002150	8" Round Rain Showerhead
FP6016008	8" Shower Arm
FP6000350	6" Showerhead
FP6001006	60" Shower Hose*
FA802	Slide Bar With Integral Outlet
FP40120	3-Function Hand Shower*

**sharing available where allowed by code

Kit with Alternate ADA Diverting Handle: **F193036T-ABS-AS**

Features:

- Requires 3-way diverting F1003B or F1023B valve
- Integral Stops
- Bubble Level
- Speed Connect

* Matte black kits feature: FP6001007MB Shower Hose, FP40130MB Hand Shower

Polished Chrome (CP), Brushed Nickel (BN) and *Matte Black (MB)

fluid by **Sustainable Solutions**

Email: help@sustainablesolutions.com
Toll free: 1 800 460 7019

WEBSITE

Technical Drawing

F193036T-ABS

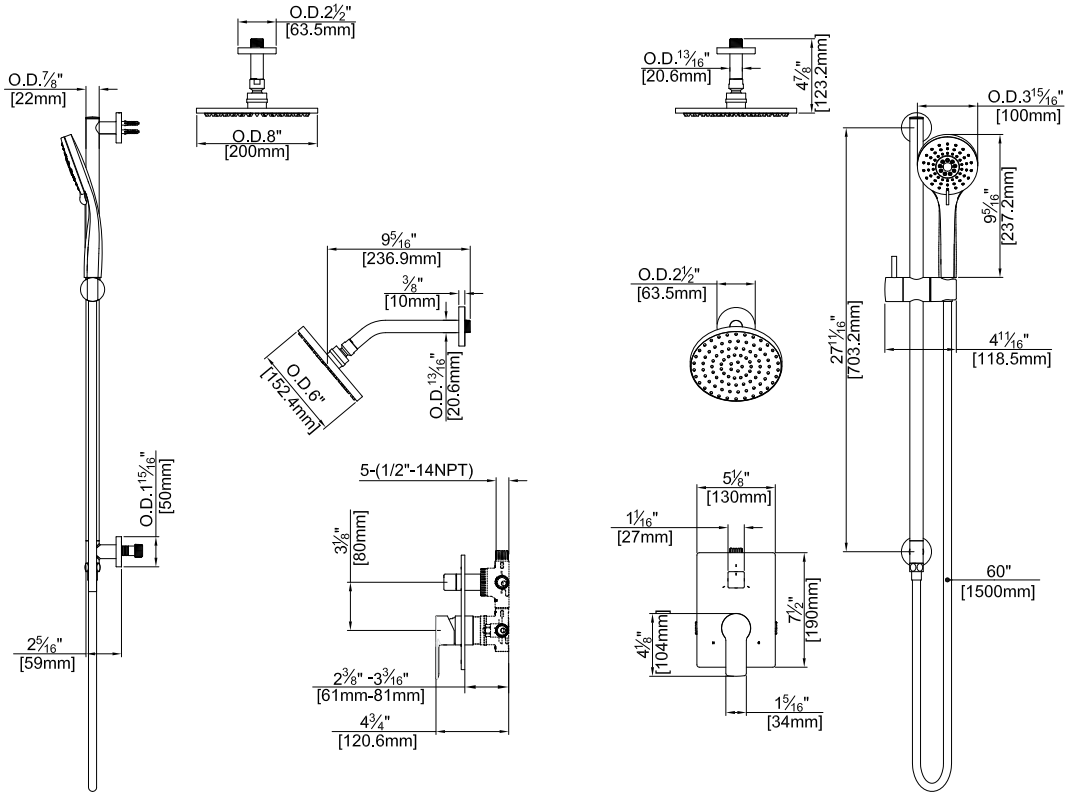

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed, ADA Compliant

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle:
F193036T-ABS-AS

Kit with round style cover plate & diverter handle: **F193036T-ABS-R**

Flow Rate:

Showerheads 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: 6" Showerhead & Hand Shower @ 1.5 gpm: **F193036T-ABS-15**