

**Specifications:**

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing volume control with 3-way, two handle diverting
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid™ F1003B or F1023B pressure balancing valve, (sold separately and available with shut off or \*\*sharing in solder, PEX and PEX-W, F1960 Expansion PEX.)

**Components:**

|                     |                                |
|---------------------|--------------------------------|
| F1001T .....        | Cartridge Sleeve               |
| FP6019041 .....     | Cartridge Handle               |
| FP801013 .....      | Diverter Sleeve                |
| FP605752 .....      | Diverter Handle                |
| FP6001143-3PB ..... | Square Cover Plate             |
| FP6001150 .....     | 8" Square Rain Showerhead      |
| FP6007108 .....     | 16" Shower Arm                 |
| FP40120 .....       | 3-Function Hand Shower         |
| FA802 .....         | Slide Bar With Integral Outlet |
| FP6001006 .....     | 60" Shower Hose                |
| FP6096035 .....     | Square Tub Spout               |

\*\*sharing available where allowed by code

Kit with Alternate ADA Diverter Handle: **F193224T-ABS-AR**

**Features:**

Requires 3-way diverting F1003B or F1023B valve



Integral Stops



Bubble Level



Speed Connect

## Yaletown Tub, Rain Shower & Hand Shower on Slide Bar Trim Kit


### F193224T-ABS



Polished Chrome (CP) and Brushed Nickel (BN)

# Technical Drawing

F193224T-ABS

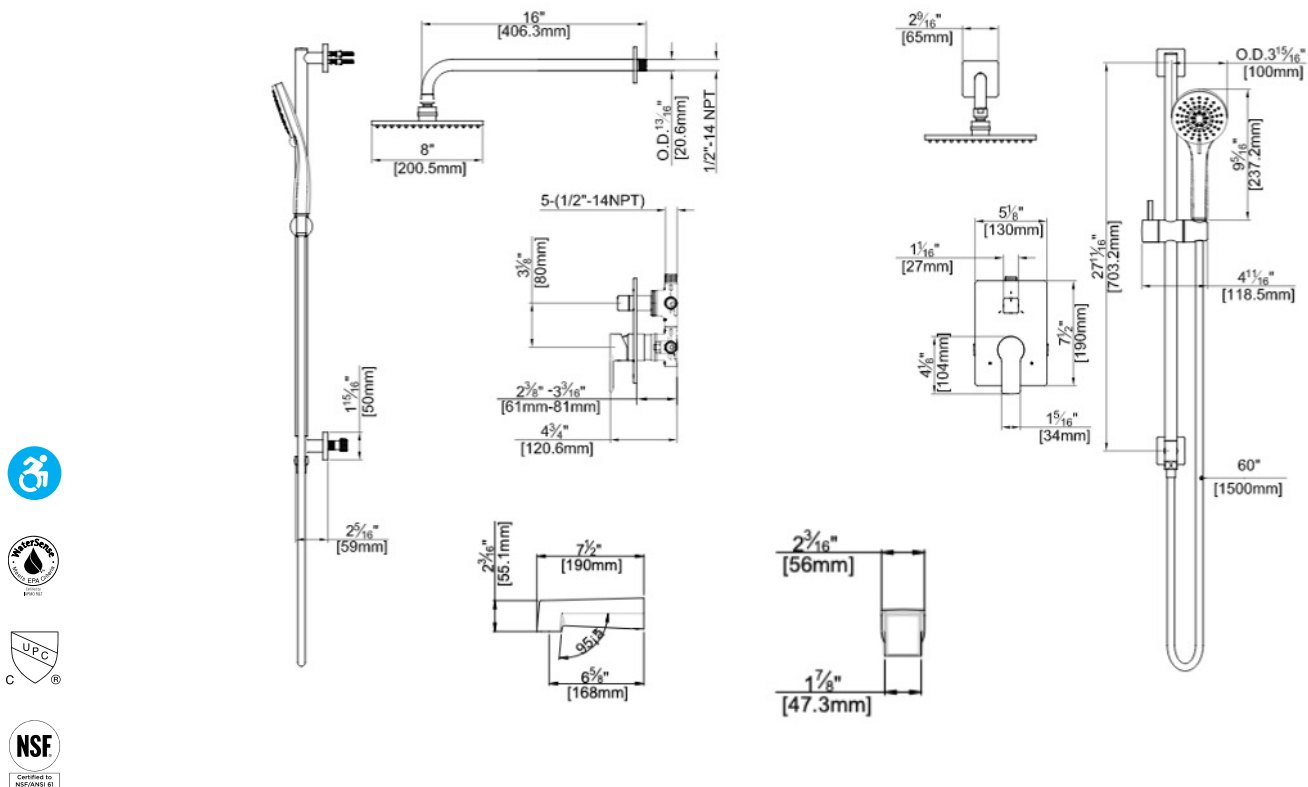

**Codes and Standards:** ANSI/ASME A112.18.1, CSAB125.1, IAPMO /cUPC Listed, EPA Watersense Listed, ADA Compliant

## Warranty:

Limited Lifetime Faucet Warranty  
against material and manufacturing  
defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

## Kit Variations:

Kit with ADA diverter handle:

**F193224T-ABS-AR**

Kit with square style cover plate & diverter handle: **F193224T-ABS-S**

## Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Hand Shower  
@ 1.5 gpm: **F193224T-ABS-15**