

Specifications:

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing volume control with 2-way, single handle diverting
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid™ F1002B or F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:

F1001T	Cartridge Sleeve
FP6019041	Yaletown Handle
FP6001035-2PS	Round Cover Plate
FP6016008	8" Shower Arm
FP20100	5-Function Showerhead
FP6001048	Round Hand Shower*
FA101	Slide Bar
FP6082048	Wall Outlet
FP6001006	60" Shower Hose*

* Matte black uses an FP6001007MB Shower Hose & FP6006048MB Round Hand Shower

Features:

 Requires 2-way diverting F1002B or F1042B valve

 Integral Stops  Bubble Level

Yaletown 5-Function Shower & Round Hand Shower on Slide Bar


F194103T



Polished Chrome (CP), Brushed Nickel (BN), & Matte Black (MB)

Technical Drawing

F194103T

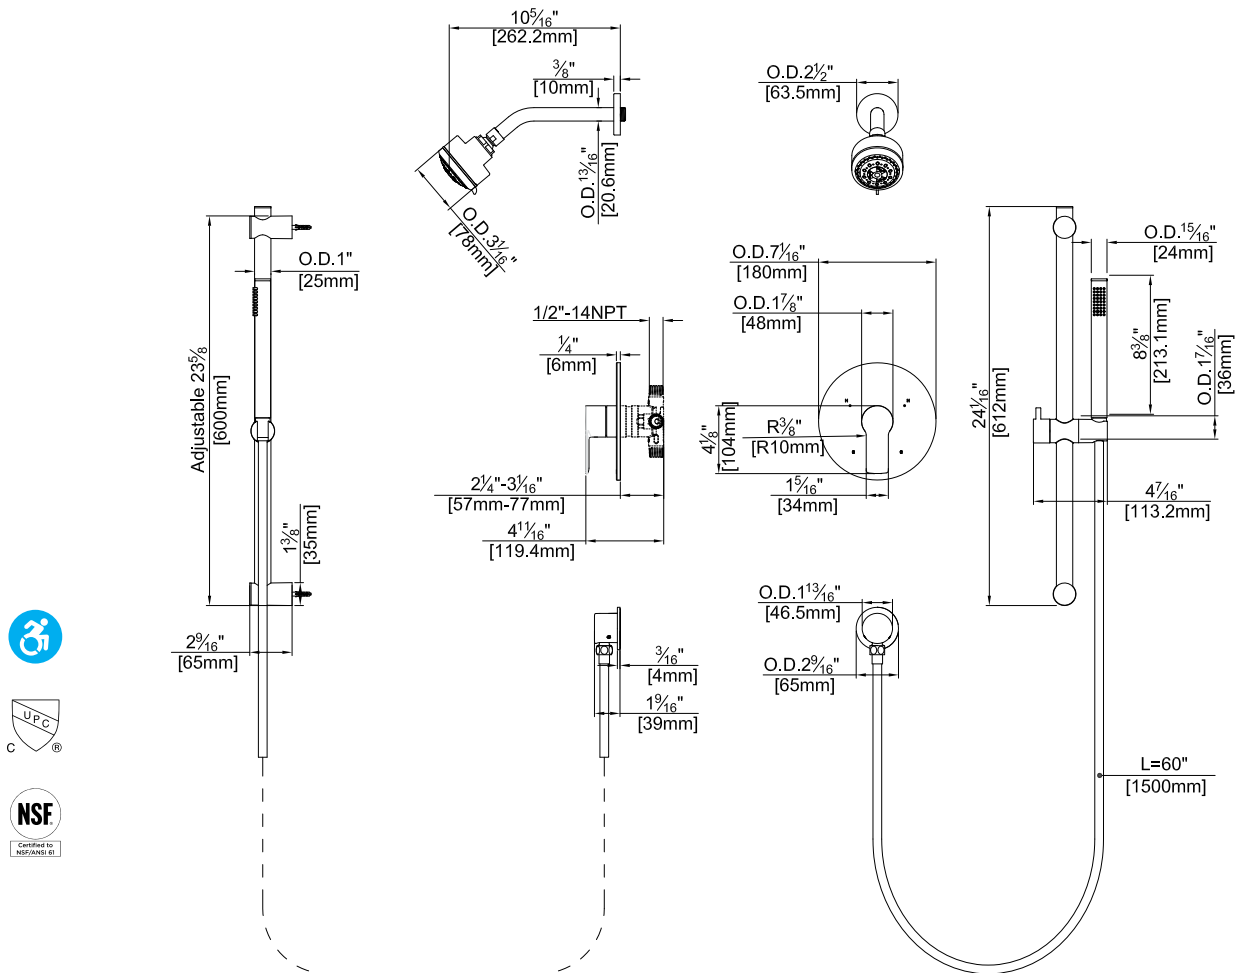

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Shower-head & Hand Shower @ 1.5 gpm:

F194103T-15