

Specifications:

- → Metal construction for durability and reliability
- → Pressure balancing volume control with 2-way single handle diverting
- → Maximum temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- Requires the fluid™F1002B or F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX)

Components:

F1001T	Cartridge Sleeve
FP6019041	Yaletown Handle
FP6001035-2PS	Round Cover Plate
FP6016008	8" Shower Arm
FP10120	4" Round Showerhead
FP6001048	Round Hand Shower*
FA101	Slide Bar
FP6082048	Wall Outlet
FP6001006	60" Shower Hose*

Matte black uses an FP6001007MB Shower Hose & FP6006048MB Round Hand Shower

Features:



Requires 2-way diverting F1002B or F1042B valve



Integral Stops



Bubble Level

Yaletown 4" Showerhead & Hand Shower Trim Kit with Slide Bar

F194106T



Polished Chrome (CP), Brushed Nickel (BN), & Matte Black (MB)

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com


Toll free: 1 800 460 7019



fluid[™]

Technical Drawing

F194106T

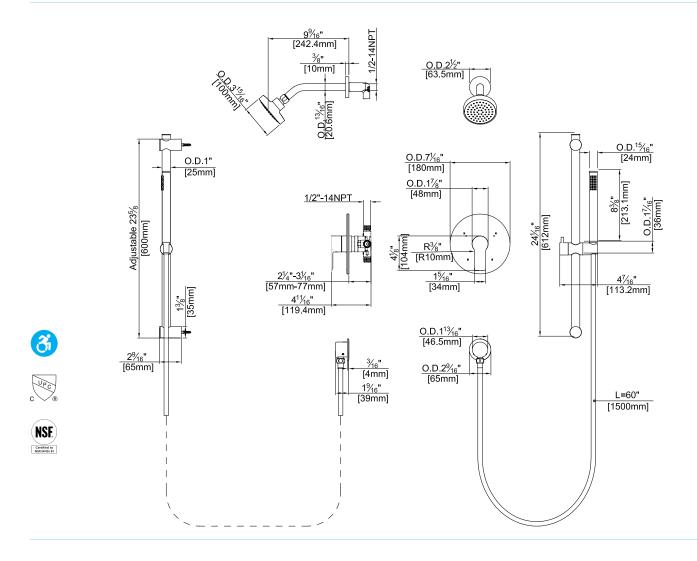

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Shower-head & Hand Shower @ 1.5 gpm: **F194106T-15**

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com

Toll free: 1 800 460 7019



F194106T November 2025