

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 3-way two handle diverting
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- > Valve and trim packages are sold separately
- → Requires the fluid F1003B or F1023B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:


| . Cartridge Sleeve |
|-----------------------|
| . Yaletown Handle |
| . Diverter Sleeve |
| . Diverter Handle |
| . Cover Plate |
| . 8" Shower Arm |
| . 6" Shower Head |
| . Square Hand Shower* |
| . Slide Bar |
| . Wall Outlet |
| . 60" Shower Hose* |
| . Yaletown Tub Spout |
| |

^{**}sharing available where allowed by code

Features:







Speed Connect

Yaletown Square Tub, 6" Shower Head & Hand Shower Trim Kit

F193247T




Matte black uses an FP6001007MB Shower Hose & FP6005048MB Square Hand Shower

Polished Chrome (CP), Brushed Nickel (BN), & Matte Black (MB)



Technical Drawing

F193247T

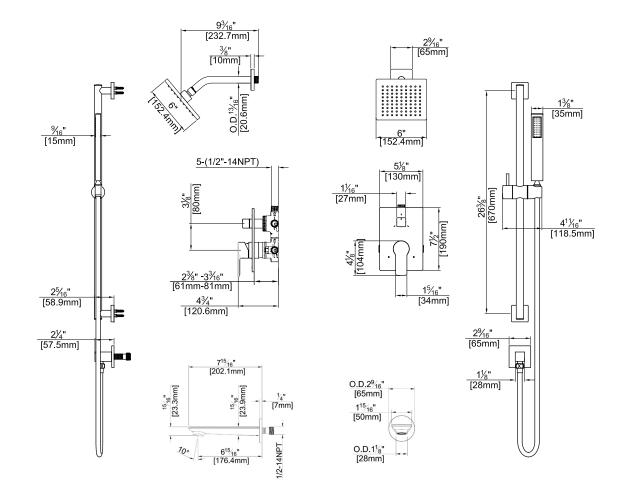

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed, ADA Compliant

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:



Kit with alternate ADA diverter handle: **F193247T-AS**

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Shower Head & Hand Shower @ 1.5 gpm: **F193247T-15**