

## Pull Down Kitchen Faucet






F829

### Specifications:

- Metal construction for durability and reliability
- Angular swivel spout with 360° or 140° rotation with supplied stop
- Kerox ceramic cartridge ensures lifelong trouble-free service
- Single handle operation, allows both volume and temperature control
- Quick and easy installation with quick hose connector
- Dual function spray head with spray and aerated flow
- Flow rate of 1.8 gpm (6.8 lpm) at 60 psi
- Maximum deck thickness of 1 3/4" with spacer and 2 1/2" (63 mm) without spacer
- 1 1/2" (38 mm) faucet hole size for drilling is recommended
- 8" deck plate for 3 hole installation is available and sold separately
- ADA Compliant





### Features:

-  360 Degree Rotation with 140 Degree Lock
-  Dual Spray Kitchen Faucet
-  Ceramic Disk Cartridge
-  Pull Down Kitchen Spout
-  Metal construction

Polished Chrome (CP), Brushed Nickel (BN), Matte Black (MB)

## Technical Drawing

F829

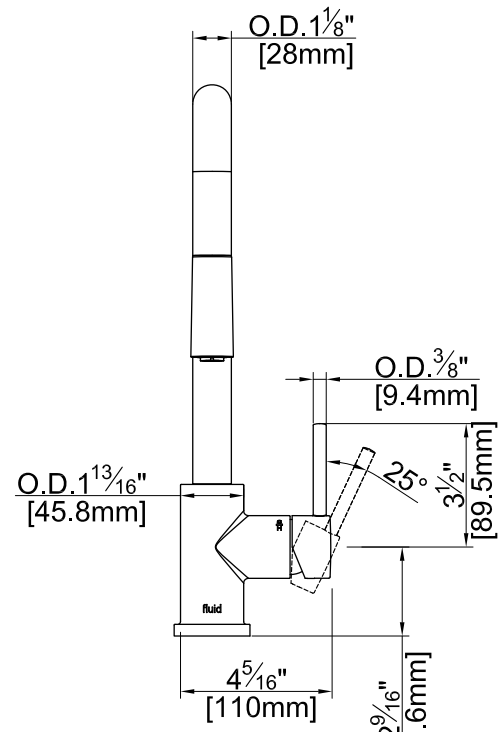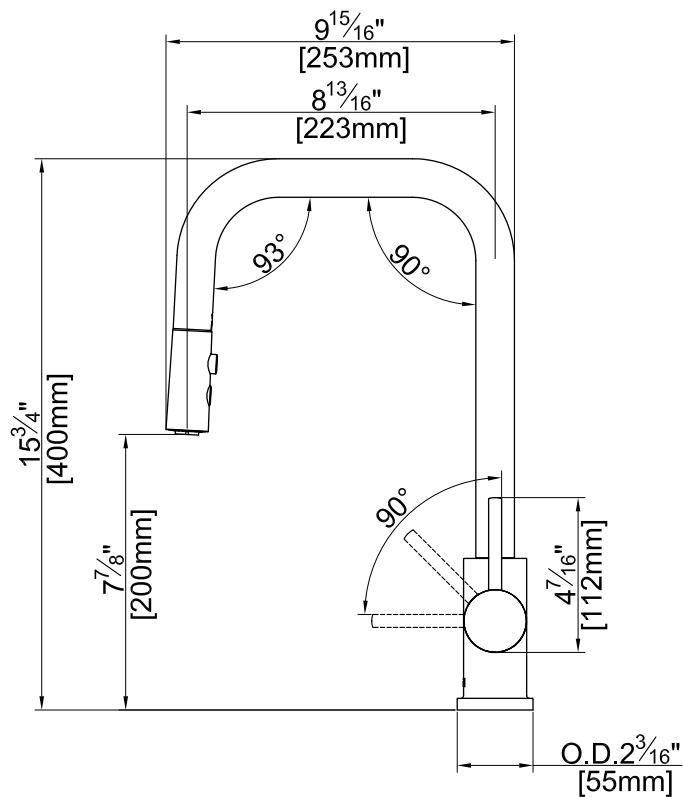

### Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

### Codes & Standards:

ANSI/ASME A112.18.1

CSA B125.1

NSF/ANSI/CAN 61: Q < 1

NSF / ANSI / CAN372

IAPMO / cUPC Listed

EPA Watersense Listed

### Flow Rate:

1.8 gpm, (6.8 lpm) at 60 psi