

Specifications:

- Heavy brass construction
- Kerox ceramic cartridge ensures lifelong trouble free service
- Single side lever handle operation, allowing both volume and temperature control
- fluid Eco-Care swivel aerator prevents splash back by allowing adjustment to the direction of water flow
- low rate of 1.2 gpm, (4.6 lpm) at 60 psi
- fluid "Speed Connector" for easy spout installation
- Waste pop-up drain is available and sold separately
- Must be used together with wall mounted faucet rough in F3000B, (sold separately).



F3000B


Horizontal, wall mounted faucet rough-in valve, (sold separately).

Features:

-  Precision Ceramic Disc Cartridge
-  Brass Construction
-  Swivel Aerator to align water stream

Design 21 Series Single Lever Wall Mounted Bathroom faucet


F29008TMB-SP

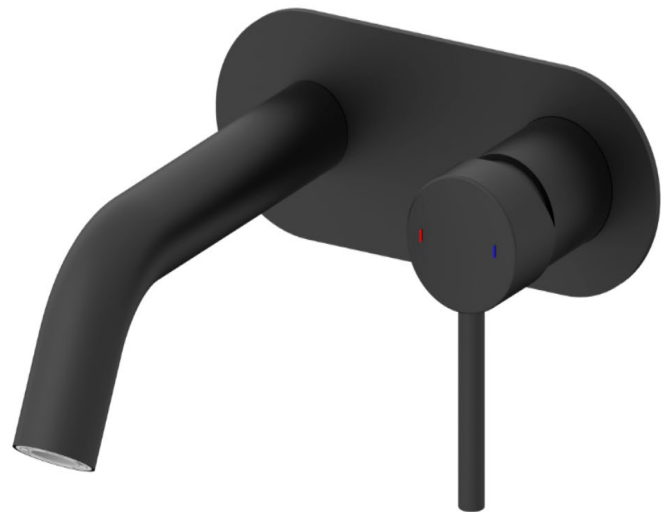

Matte Black (MB)

Technical Drawing

F29008TMB-SP

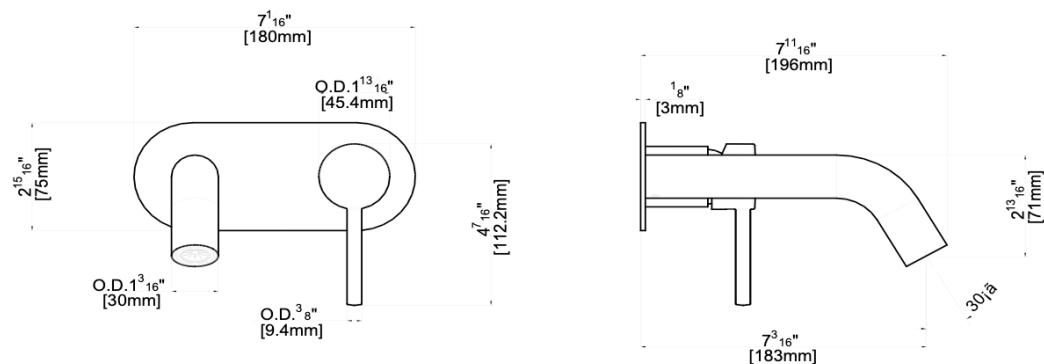

Warranty:

Limited Lifetime Faucet Warranty
against material and manufacturing
defects for residential use.

2 Year Limited Warranty on all industrial,
commercial and business applications.

Codes & Standards:

ANSI/ASME A112.18.1
CSA B125.1
NSF61-9
IAPMO / cUPC Listed
EPA Watersense Listed
AB1953 California Lead Plumbing Law
Certified
ADA

Flow Rate:

1.2 gpm, (4.6lpm), @ 60 psig