

Specifications:

- Brass construction
- Three-hole wall mount installation
- High quality ceramic cartridge
- Dual handle operation allows both volume and temperature control
- fluid Eco-Care swivel aerator prevents splash back by allowing adjustment to the direction of water flow
- low rate of 1.0 gpm, (3.8 lpm) at 60 psi
- fluid "Speed Connector" for easy spout installation
- Waste pop-up drain is available and sold separately
- Must be used together with the F3200B wall mounted faucet rough in (sold separately).

Design 21 Series Dual Handle Wall Mounted Bathroom faucet

F29015T



F3200B

Requires the fluid dual-handle Wall Mount rough-in, (sold separately).


Features:

-  Precision Ceramic Disc Cartridge
-  Brass Construction
-  Swivel Aerator to align water stream

Polished Chrome (CP), PVD Brushed Nickel (BN),
Matte Black (MB) & PVD Brushed Gold (BG)

Technical Drawing

F29015T

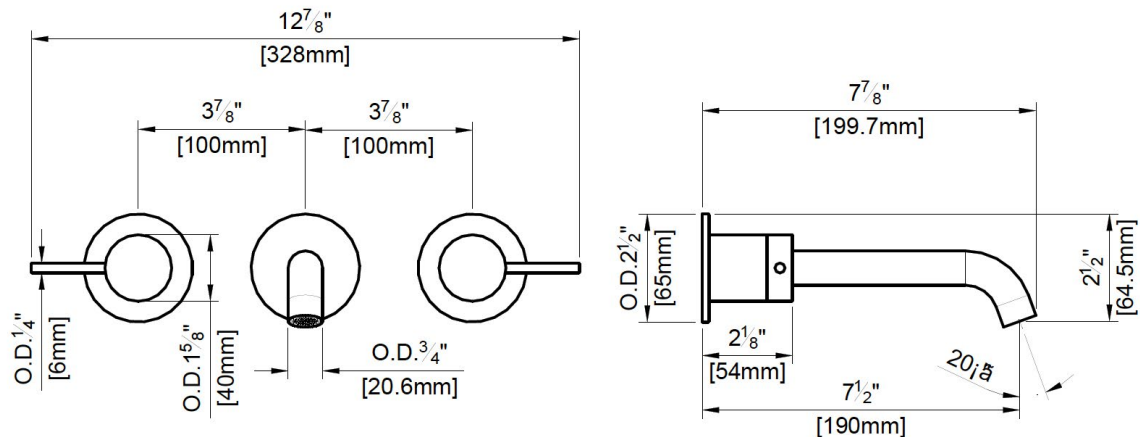

Warranty:

Limited Lifetime Faucet Warranty
against material and manufacturing
defects for residential use.

2 Year Limited Warranty on all industrial,
commercial and business applications.

Codes & Standards:

ANSI/ASME A112.18.1
CSA B125.1
NSF/ANSI/CAN61-9 Q<1
NSF/ANSI/CAN372
IAPMO / cUPC Listed
Watersense Listed
AB1953 California Lead Plumbing Law
Certified
ADA

Flow Rate:

1.0 gpm, (3.8 lpm), @ 60 psig