

## Specifications

- Undermount single bowl R20 tight radius kitchen sink
- High quality fluid sink is formed of #18 gauge (1.2mm) type 304 (18-8) nickel-bearing stainless steel
- Minimum cabinet size: 30" (762mm)
- Shallow 5-1/2" bowl depth provides additional knee clearance to assist in achieving ADA-compliant installations.
- Has 3 1/2" (90mm) diameter recessed drain opening.
- Single bowl with drain lines
- Full undercoating and large rubber pads for noise reduction and condensation elimination.
- Cut-out template and mounting hardware are included.
- Stainless steel basket strainer is available and sold separately.
- The sink is stack packed in bulk.

### Overall Dimensions:

27" (685mm) x 18" (456mm) x 5 1/2" (140mm)

### Codes and Standards

- ANSI/ASME A112.19.3-2000
- CSA B45 Series-02
- IAPMO / cUPC Listed




### Warranty

Limited Lifetime Warranty for residential use.

Full warranty details, exclusions and application-specific coverage are available in the **fluid Kitchen Sink Warranty** under Resources > Warranty Information on our website.

### Installation Details

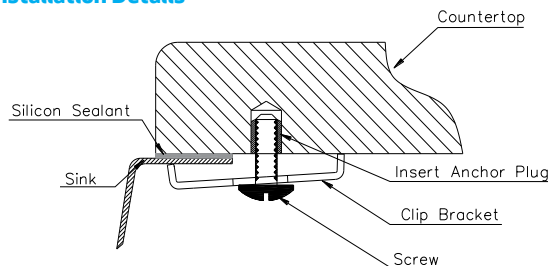


### Optional Accesories

Such as colander, bottom grid and cutting board may be available. Please contact our sales representative for details.

## Tight Radius Precision Formed Single Bowl Kitchen Sink-ADA

FSP-USR2718-5.5

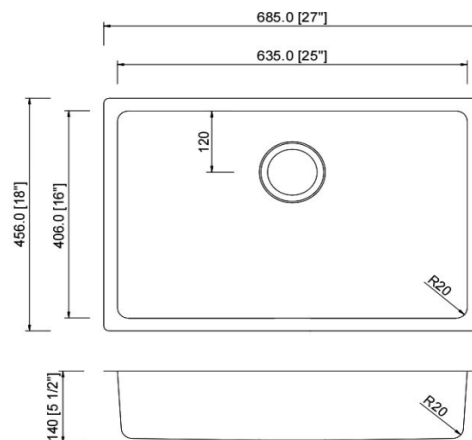

**Finish Available:** Stainless Steel

### Important Note:

Cut-out template is included in the carton box. Fabricator must check it for accuracy. We are not responsible for wrong cutting.