

Specifications:

- Metal construction for durability and reliability
- Pressure balancing volume control with 2-way, two handle diverting
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Valve and trim packages are sold separately
- Requires the fluid F1012B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:

F1001TBG	Cartridge Sleeve
FP6019041BG	Yaletown Handle
FP801013BG	Diverter Sleeve
FP605652BG	Diverter Handle
FP6001142BG-2PB	Round Cover Plate
FP6006008BG	16" Shower Arm
FP6002050BG	8" Brass Rain Showerhead*
FP40120BG	3 Function Hand Shower*
FA802BG	Slide Bar with Integral Outlet
FP6001006BG	60" Shower Hose*

**sharing available where allowed by code

Kit with Alternate ADA Diverter Handle: **F192025TBG-AR**




Features:

-  Requires F1012B
-  Bubble Level
-  Integral Stops
-  Speed Connect

Yaletown 4" shower Head & Hand Shower on Slide Bar Trim Kit


F192025TBG

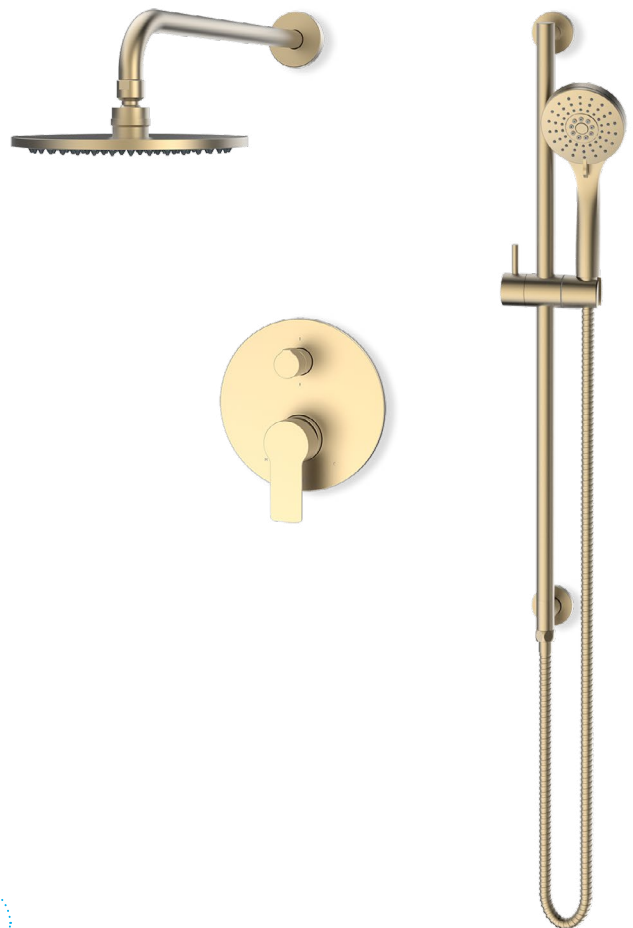

PVD Brushed Gold (BG)

Technical Drawing

F192025TBG

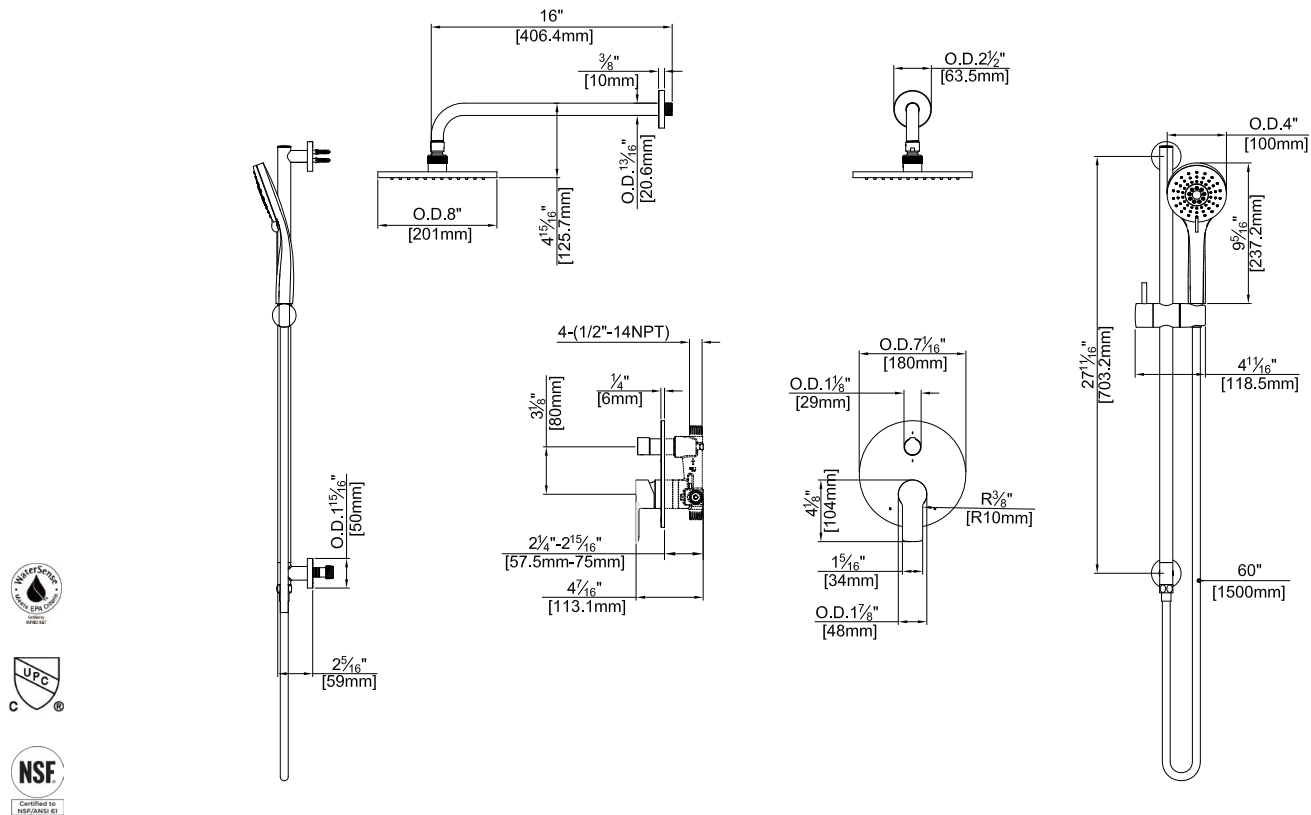

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO/cUPC Listed, EPA Watersense Listed

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle:

[F192025TBG-AR](#)

Kit with square style cover plate & diverter handle: [F192025TBG-S](#)

Flow Rate:

Shower Head 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: [F192025TBG-15](#)