

Specifications:

- ➔ Metal construction for durability and reliability, (valve trim plate and shower arm crafted from stainless steel for strength and corrosion resistance)
- ➔ Pressure balancing with 2-Way diverter, ceramic cartridge for anti-scald protection
- ➔ Single lever handle operation allows flow diverting and temperature control
- ➔ 4" round shower head and 8" shower arm
- ➔ Stainless Steel Pipe tub spout with fluid Speed Connect
- ➔ Requires the fluid 2-Way diverting F1002B or F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)
- ➔ ADA Compliant

Components:

F1021T	Sleeve Tube and Cap*
FP6029041	Rod Handle
FP6002035-2PS	Round Cover Plate*
FP10120	4" Round Shower Head
FP6016008	8" Shower Arm*
FP6157034	Pipe Tub Spout*

Features:

 Requires 2-Way diverting F1002B or F1042B valve

 Integral Stops

 Bubble Level

 ADA

 Stainless Steel *

Round Tub & Shower Head Trim Kit

(Compliments Design 21,
Citi Rod and Pipe Series)


F804115T



Polished Chrome (CP) &
Brushed Stainless Steel (BN₁), to compliment Brushed Nickel

Technical Drawing

F804115T

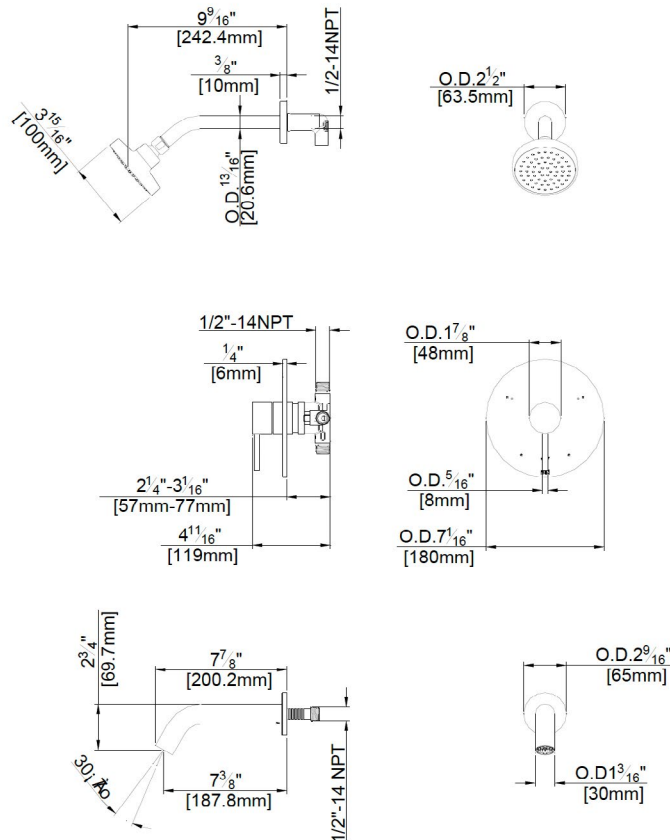

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes & Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC

Flow Rate:

Shower Head 1.8 gpm @ 60 psig

Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Shower Head @ 1.5 gpm: **F804115T-15**