

Specifications:

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing with built-in 2-way diverter ceramic cartridge ensures anti-scald operation
- ➔ Single lever handler allows flow diverting and temperature control
- ➔ Slide Bar comes with integral wall outlet and 3-function hand shower wand
- ➔ Slimline tub spout with fluid speed connection
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid non-diverting F1002B or F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve Tube and Cap
FP6029041	Rod Handle
FP6002035-2PS	Round Cover Plate-stainless
FP6001006*	60" Shower Hose
FP40120*	3-Funtion Hand Shower
FA802	Slide Bar with wall outlet
FP6095035	Slimline Tub Spout

Features:



Requires 2-Way diverting F1002B or F1042B valve



Integral Stops



Bubble Level



Speed Connect

Tub and 3-function Hand Shower on Slide Bar Trim Kit

(Compliments Design 21, Citi Rod and Pipe Series)

F804122T




Polished Chrome (CP), Brushed Nickel (BN) and Matte Black (MB)

* The FP6001007MB Shower Hose & FP40130MB 3-Function Hand Shower are utilized in the F804122TMB Matte Black shower kit.

Technical Drawing

F804122T

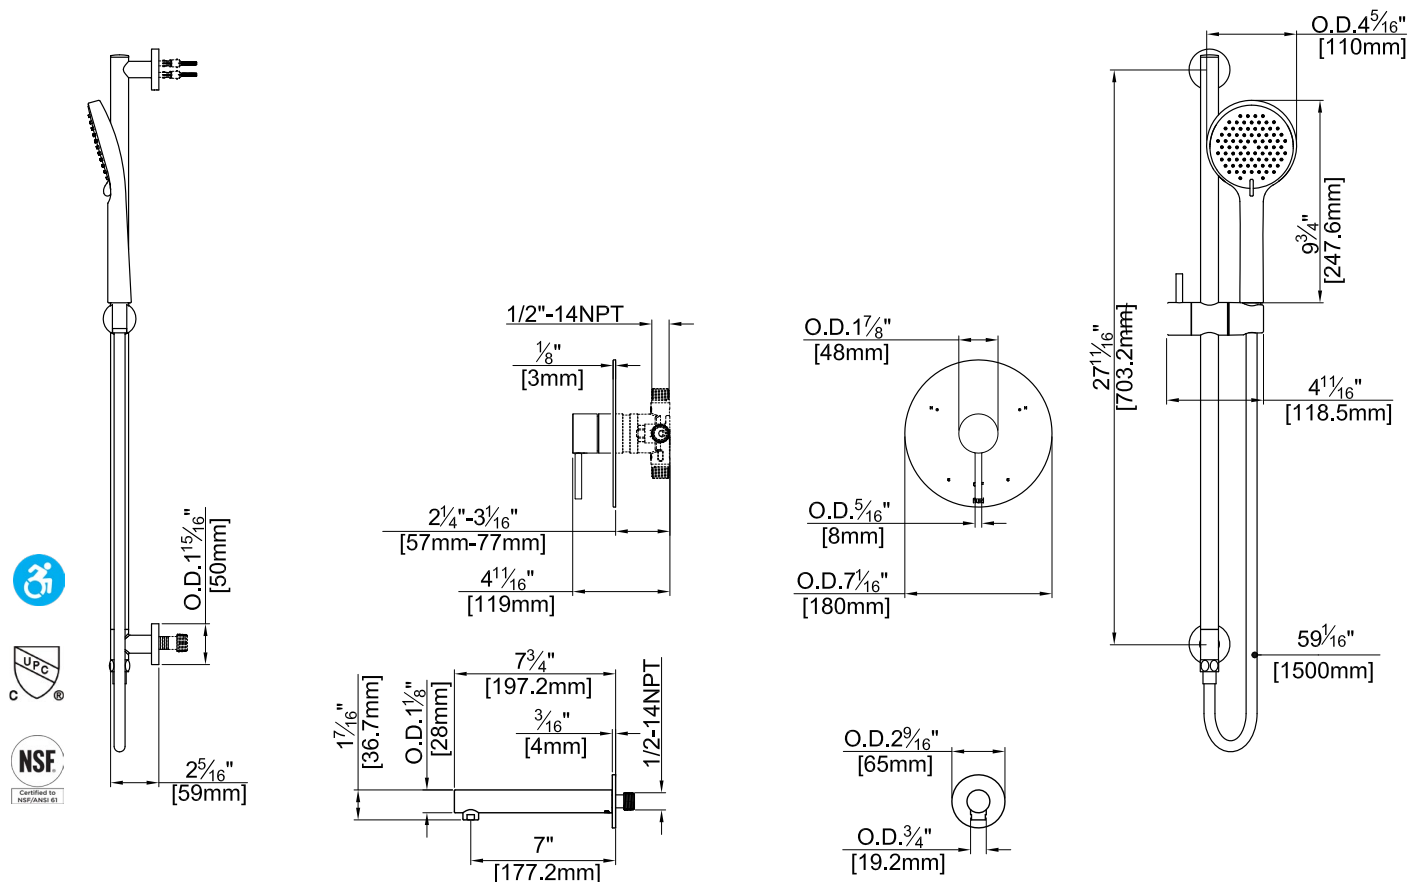

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
2 Year Limited Warranty on all industrial, commercial and business applications.

Codes & Standards:

ANSI/ASME A112.18.1
CSA B125.1
IAPMO / cUPC listed
ADA

Flow Rate:

Hand Shower @1.8 gpm @60 psig
Tub Spout 4.5 gpm @ 60 psig