

Citi Tub & Shower Trim Kit

Specifications:

- ➔ Metal construction
- ➔ Pressure balancing volume control
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ 6" round shower head and 8" shower arm
- ➔ 7.5" Slimline diverting tub spout with threaded 1/2" NPT connection
- ➔ Requires the fluid F1021B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

F241301T



Components:

F1001T	Sleeve Tube and Cap
FP6024041	Blade Handle
FP6002035-1PB	SST 304 Round Cover Plate
FP6195134NPT7.5	SST 304 Slim Diverting Tub Spout
FP6016008	SST 304 8" Shower Arm
FP6000350	6" Round Shower Head

Features:

 Requires non-diverting F1021B valve

 Integral Stops


 Bubble Level

 Threaded NPT Tub Spout

Polished Chrome (CP), PVD Brushed Nickel (BN),
PVD Brushed Gold and Matte Black (MB)

Technical Drawing

F241301T

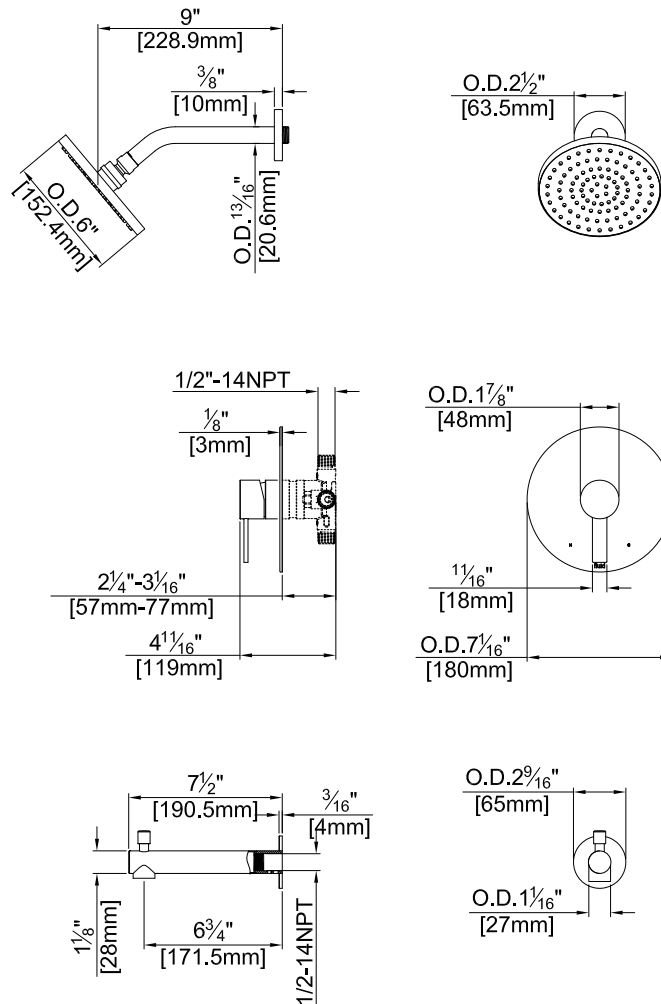

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

Full warranty details, exclusions and application-specific coverage are available in the **fluid faucets & shower systems Warranty** under Resources > Warranty Information on our website.

Codes and Standards:

ANSI/ASME A112.18.1
CSA B125.1
IAPMO / cUPC Listed

Flow Rate:

Shower Head 1.8 gpm @ 60 psig
Tub Spout 4.5 gpm @ 60 psig
(when installed with a fluid pressure balancing valve)

Low Flow Alternative: Shower Head
@1.5 gpm: **F241301T-15**

F241301T July 2026