

## Citi Tub & 4" Shower Trim Kit (Single Handle)

F244304T

### Specifications:

- Metal construction for durability and reliability
- Pressure balancing, single handle, 2-way diverting with temperature control
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- 4" round shower head and 8" shower arm
- 6" Pipe tub spout with 1/2" NPT threaded connection
- Requires the fluid F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)
- ADA Compliant

### Components:

|                     |                           |
|---------------------|---------------------------|
| F1001T .....        | Sleeve Tube and Cap       |
| FP6024041 .....     | Blade Handle              |
| FP6002035-2PS ..... | Round Cover Plate         |
| FP6157134NPT6 ..... | SST 304 6" Pipe Tub Spout |
| FP6016008 .....     | SST 304 8" Shower Arm     |
| FP10120 .....       | 4" Round Shower Head      |



### Features:



Requires 2-Way diverting F1042B valve



Integral Stops



Bubble Level




Threaded NPT  
Tub Spout

Polished Chrome (CP), PVD Brushed Nickel (BN),  
PVD Brushed Gold and Matte Black (MB)

## Technical Drawing

F244304T

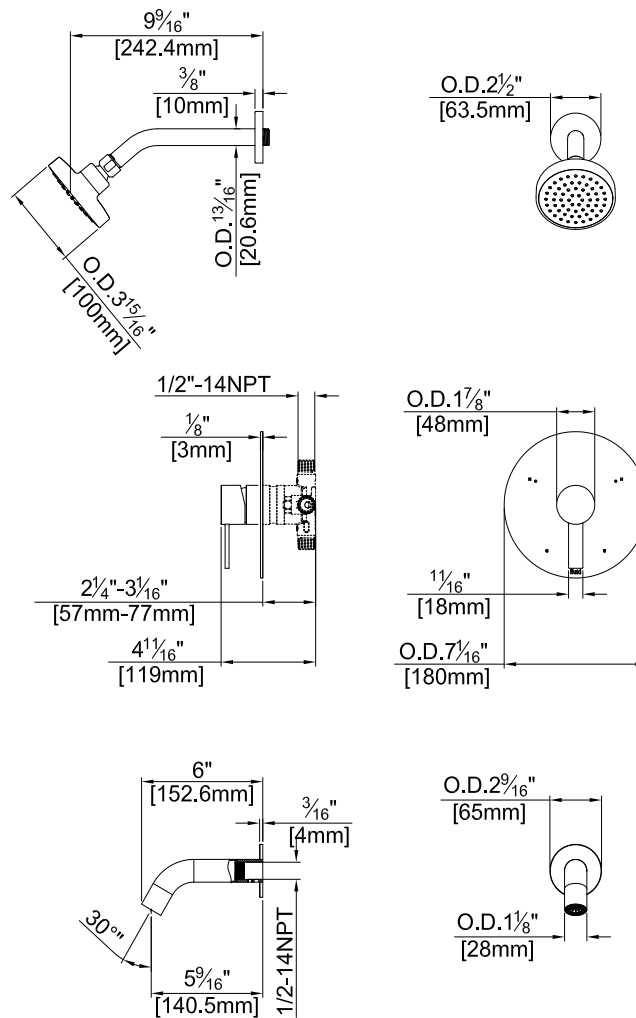

### Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

Full warranty details, exclusions and application-specific coverage are available in the **fluid faucets & shower systems Warranty** under Resources > Warranty Information on our website.

### Codes and Standards:

ANSI/ASME A112.18.1  
CSA B125.1  
IAPMO / cUPC Listed

### Flow Rate:

Shower Head 1.8 gpm @ 60 psig  
Tub Spout 4.5 gpm @ 60 psig  
(when installed with a fluid pressure balancing valve)

Low Flow Alternative: Shower Head  
@1.5 gpm: [F244304T-15](#)