

Design 21 Tub & 4" Shower Trim Kit (Single Handle)

F804302T

Specifications:

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing, single handle, 2-way diverting with temperature control
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ 4" round shower head and 8" shower arm
- ➔ 7.5" slimline tub spout with 1/2" NPT threaded connection
- ➔ Requires the fluid F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)
- ➔ ADA Compliant

Components:

F1001T	Sleeve Tube and Cap
FP6029041	Rod Handle
FP6002035-2PS	Round Cover Plate
FP6195135NPT7.5	SST 304 7.5" Slim Tub Spout
FP6016008	SST 304 8" Shower Arm
FP10120	4" Round Shower Head



Features:

 Requires non-diverting F1042B valve

 Integral Stops


 Bubble Level

 Threaded NPT Tub Spout

Polished Chrome (CP), PVD Brushed Nickel (BN),
PVD Brushed Gold and Matte Black (MB)

Technical Drawing

F804302T

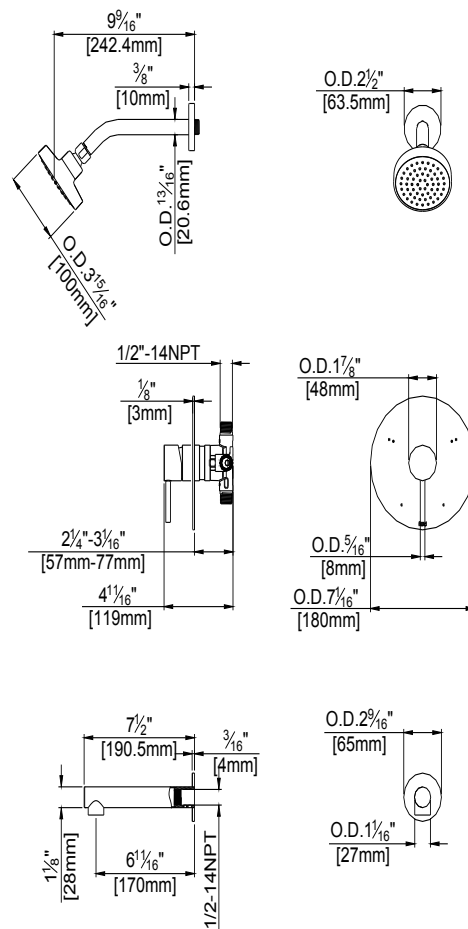

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

Full warranty details, exclusions and application-specific coverage are available in the **fluid faucets & shower systems Warranty** under Resources > Warranty Information on our website.

Codes and Standards:

ANSI/ASME A112.18.1
CSA B125.1
IAPMO / cUPC Listed

Flow Rate:

Shower Head 1.8 gpm @ 60 psig
Tub Spout 4.5 gpm @ 60 psig
(when installed with a fluid pressure balancing valve)

Low Flow Alternative: Shower Head @1.5 gpm: **F804302T-15**