fixtures for life

Design 21 Tub & 4" Shower Trim Kit (Single Handle)

F804304T

Specifications:

- Metal construction for durability and reliability
- Pressure balancing, single handle, 2-way diverting with temperature control
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- 4" round shower head and 8" shower arm
- 6" Pipe tub spout with ½" NPT threaded connection
- Requires the fluid F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)
- ADA Compliant

Components:

F1001T	Sleeve Tube and Cap
FP6029041	Rod Handle
FP6002035-2PS	Round Cover Plate
FP6157134NPT6	SST 304 6" Pipe Tub Spout
FP6016008	SST 304 8" Shower Arm
FP10120	4" Round Shower Head

Features:

Requires 2-way diverting F1042B valve

Integral Stops

Bubble Level

Threaded NPT Tub Spout

Polished Chrome (CP), PVD Brushed Nickel (BN), PVD Brushed Gold and Matte Black (MB)

fluid by **Sustainable Solutions**

Email: help@sustainablesolutions.com
Toll free: 1 800 460 7019

WEBSITE

Technical Drawing

F804304T

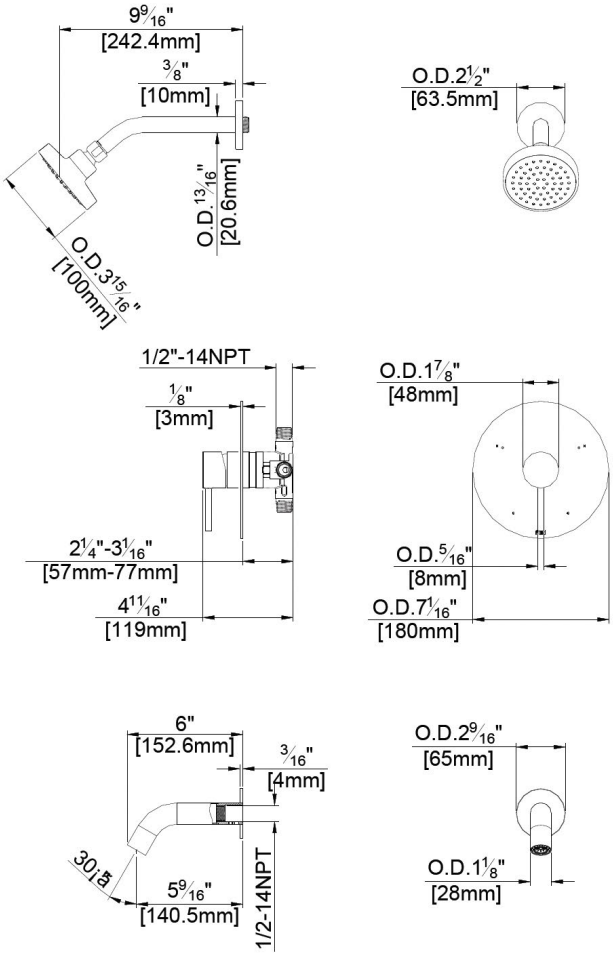

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

Full warranty details, exclusions and application-specific coverage are available in the **fluid faucets & shower systems Warranty** under Resources > Warranty Information on our website.

Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

Flow Rate:

Shower Head 1.8 gpm @ 60 psig

Tub Spout 4.5 gpm @ 60 psig (when installed with a fluid pressure balancing valve)

Low Flow Alternative: Shower Head @1.5 gpm: F804304T-15

fluid by **Sustainable Solutions**

Email: help@sustainablesolutions.com
Toll free: 1 800 460 7019

WEBSITE