


Specifications:

- ➔ Part of the **fluidzero** collection of fluid products
- ➔ Crafted from food grade 304 stainless steel for durability and lead-free properties
- ➔ Single lever handle operation allows for temperature control and diverts flow between spout and hand shower
- ➔ Pressure Balancing High Quality Precision ceramic cartridge meets cUPC anti-scald requirements
- ➔ Flow rate of 5.3 gpm (20 lpm) at 45 psi and 6.8 gpm (26 lpm) @ 60 psi for spout
- ➔ Inlet connection 1/2" NPT female thread
- ➔ Quick and easy floor-mounted installation
- ➔ Rotational or fixed hand shower support
- ➔ Fixed tub spout
- ➔ Requires the F4034A-Base, sold separately

Free Standing Tub Filler with Hand Shower

F4043A-Filler

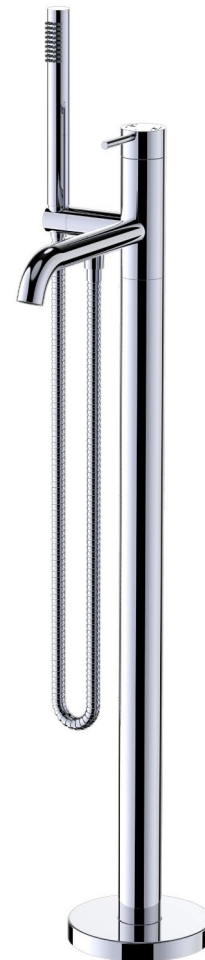


Features:

-  Precision Ceramic Disc Cartridge
-  Stainless Steel Construction

Polished Chrome (CP), PVD Brushed Nickel (BN),
Matte Black (MB1) & PVD Brushed Gold (BG)

Technical Drawing

F4043A-Filler

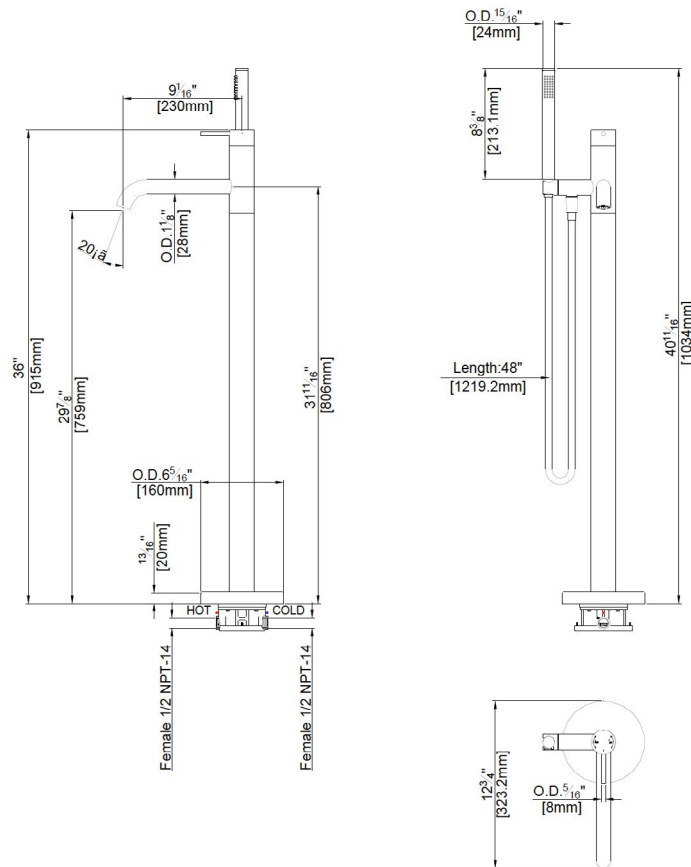

Warranty:

Limited Lifetime Warranty against defects in materials and workmanship for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications,

For complete warranty details and limitations, visit our website, (linked below).

Codes & Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

Flow Rate:

Spout: 5.3 gpm (20 lpm) @ 45 psi and 6.8 gpm (26 lpm) @ 60 psi

Hand Shower: 1.8 gpm (6.8 lpm) @ 45 psi