

Specifications

- Heavy forged brass construction for durability and reliability
- Pressure balancing ceramic cartridge ensures anti-scald operation and life-long trouble-free service
- Single lever handle operation allows both volume and temperature control; rotating diverter handle directs water between ports.
- Max-temperature limit stop for added safety
- Integral stop valves for easy maintenance
- Inlet Ports: F1960 expansion PEX with 90 degree elbows
- Outlet Ports: $\frac{1}{2}$ " CxC soldering & $\frac{1}{2}$ " NPT thread
- Adjustable installation depth from $2\frac{15}{16}$ " (75mm) to $3\frac{5}{8}$ " (92.5mm) with raised mounting bracket, or $2\frac{3}{16}$ " (55 mm) to $2\frac{7}{8}$ " (72.5 mm) without the raised bracket.
- Mud guard is provided to help protect valve from dust and debris during installation
- Bubble level is attached to mud guard for easy and level installation
- Deep wall extension kit F-EXT1023 is sold separately.
- A wide selection of complimentary trims are sold separately

Codes and Standards

- ANSI/ASME A112.18.1 
- CSA B125.1
- IAPMO / cUPC Listed

Warranty

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Flow Rate:

- 5.5 gpm @ 60 psig

Features:



Heavy Brass



Integral Stops






Ceramic Disc Cartridge



Bubble Level

Pressure Balancing Three Way Valve (Two Handle)

F1023B-PEX-W-90-UP

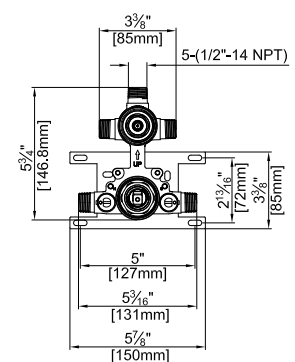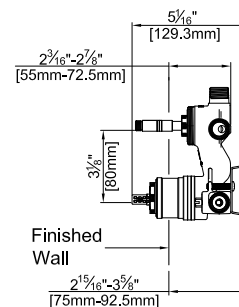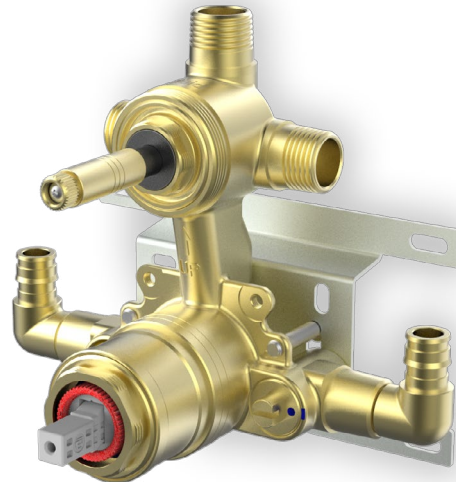

Forged from Heavy Brass

Alternate Model Available:

- **F1023B-PEX-W-90**
(with downward facing 90 degree elbows).

Model Available with Sharing:*

- **F1023B-PEX-W-90-UP-SHARE**

*Note: where allowed by code