

Specifications

- Heavy forged brass construction
- Pressure balancing with built in 2-way ceramic diverter cartridge ensures anti-scald operation
- Single lever handle operation allows flow diversion and temperature control
- Enables back-to-back installation
- Max-temperature limit stop for added safety
- Integral check stop valves for stopping cross flow and easy maintenance
- Inlet ports – F1960 expansion PEX with 90 degree elbow
- Outlet ports – 1/2" CxC soldering & 1/2" NPT thread
- Adjustable installation depth from 2-7/8" (73.5 mm) to 3-11/16" (93.5 mm) with the raised mounting bracket or 2-1/8" (53.5 mm) to 2-7/8" (73.5 mm) without mounting bracket.
- Mud guard helps to protect valve from dust and debris during installation and is used in thin wall installation
- Bubble level is attached to mud guard for easy and level installation
- Deep wall extension kit F-EXT1042 is sold separately
- Removable mounting bracket provides installation flexibility
- A wide selection of complimentary trims are sold separately

Codes and Standards

- ANSI/ASME A112.18.1 
- CSA B125.1
- IAPMO / cUPC Listed

Warranty

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Flow Rate:



- 5.5 gpm @ 60 psig

Features:

-  Heavy Brass
-  Integral Stops
-  Ceramic Disc Cartridge
-  ADA

Pressure Balancing Two Way Valve (Single Handle)

F1042B-PEX-W-90

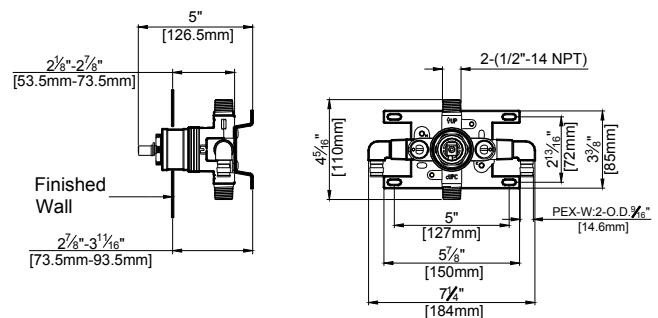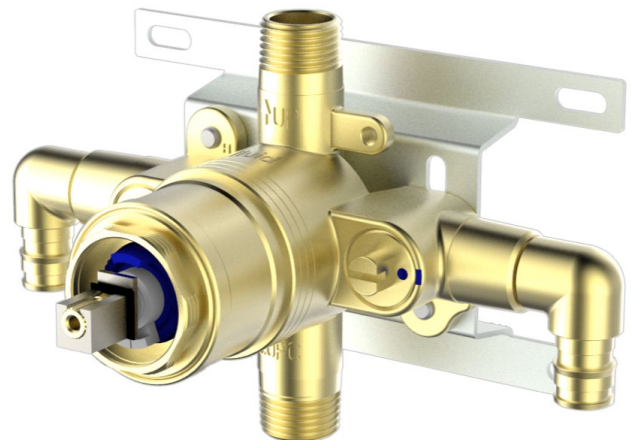

Forged from Heavy Brass

Models Available:

- F1042B-PEX-W-90-UP

