

Specifications

- Heavy forged brass construction
- Pressure balancing ceramic cartridge ensures anti-scald operation and life-long trouble-free operation
- Two-way ceramic diverter cartridge
- Single lever handle operation allows both volume and temperature control; rotating diverter handle directs water between two ports.
- Max-temperature limit stop for added safety
- Integral check stop valves for easy maintenance
- Inlet ports – F1960 expansion PEX with 90 degree elbow
- Outlet ports - $\frac{1}{2}$ " CxC soldering & $\frac{1}{2}$ " NPT thread
- Adjustable installation depth from $2\frac{15}{16}$ " (75 mm) to $3\frac{5}{8}$ " (92.5 mm) with the raised mounting bracket or $2\frac{3}{16}$ " (55 mm) to $2\frac{7}{8}$ " (72.5 mm) without raised mounting bracket.
- Mud guard helps to protect valve from dust and debris during installation and is used in thin wall installations.
- Bubble level is attached to the the mud guard for an easy and level installation
- Deep wall extension kit F-EXT1022 is sold separately
- Removable mounting bracket provides installation flexibility
- A wide selection of complimentary trims are sold separately

Codes and Standards

- ANSI/ASME A112.18.1
- CSA B125.1
- IAPMO / cUPC Listed



Warranty

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Flow Rate:

- 5.5 gpm @ 60 psig

Features:



Heavy Brass



Integral Stops





Ceramic Disc Cartridge



Bubble Level

Pressure Balancing Two Way Valve (Two Handle)

F1022B-PEX-W-90UP

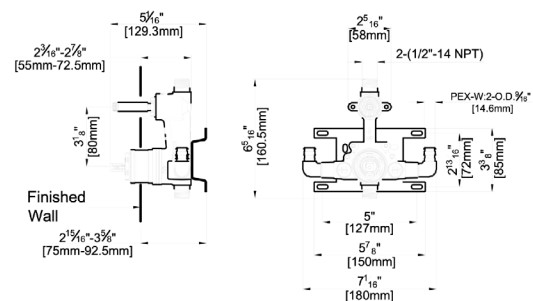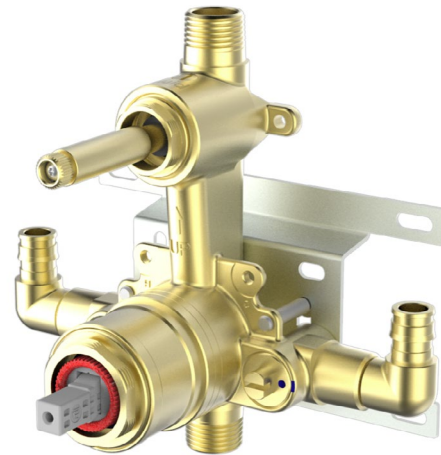

Forged from Heavy Brass

Models Available:

- **Solder/NPT:** F1022B
- **PEX:** F1022B-PEX
- **PEX-W:** F1022B-PEX-W
- **PEX-W:** F1022B-PEX-W-90
- **PEX-W:** F1022B-PEX-W-90UP

Available with Sharing:*

- F1022B-PEX-W-90UP-SHARE

*Note: where allowed by code