

Specifications

- Forged brass construction for durability and reliability
- Pressure balancing ceramic cartridge ensures anti-scald operation with lifelong trouble-free service
- Single lever handle operation allows both volume and temperature control
- Maximum temperature limit stop for added safety
- Integral stop valves for easy maintenance
- Includes check valves to prevent any crossflow
- Inlet ports - F1960 expansion PeX with 90 degree elbow
- Outlet ports - $\frac{1}{2}$ " CxC soldering & $\frac{1}{2}$ " NPT thread
- Adjustable installation depth from $2\frac{7}{8}$ " (73.5 mm) to $3\frac{11}{16}$ " (93.5 mm) with raised mounting bracket or $1\frac{1}{8}$ " (53.5 mm) to $2\frac{7}{8}$ " (73.5 mm) without mounting bracket
- Seal cap is provided for a tub only or shower only installation.
- Mud guard is provided to help protect valve from dust and debris during installation and is used in thin wall installation
- Bubble level is attached to mud guard for easy, level install
- A wide selection of decorative trims are sold separately
- Optional deep wall extension kit F-EXT1021 sold separately

Codes and Standards

- ANSI/ASME A112.18.1
- CSA B125.1
- IAPMO / cUPC Listed



Warranty

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Features:



Heavy Brass



Integral Stops




Ceramic Disc Cartridge



Bubble Level

Pressure Balancing Single Handle Valve without diverter

F1021B-PEX-W-90

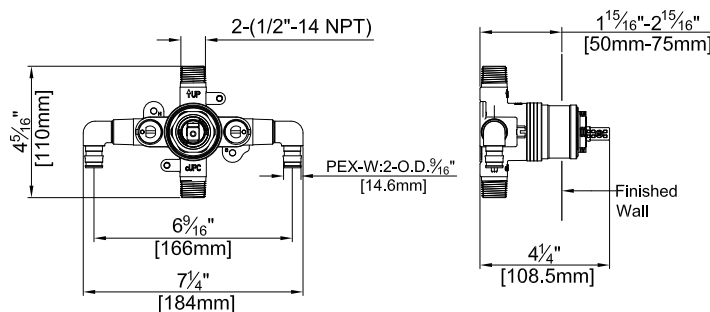

Forged from Heavy Brass | Budgetary Pricing: \$

Models Available:

- F1021B-PEX-W-90-UP

Flow Rate:

- 5.5 gpm @ 60 psig

