

## Citi Siphonic Rimless One Piece Easy Height Elongated Lever Toilet

FT240120W or (-R)

### Specifications

- Water Saving Dual Flush High Efficiency Toilet (HET)
- Vitreous China
- Designed to provide a seat height between 17-1/2" (445mm) measured to the top of the toilet seat
- Designed with smooth rounded contours and a concealed outlet for easy cleaning
- Soft close elongated seat 326202W is included
- Left lever and left inlet: **FT240120W**
- Right lever and left inlet: **FT240120W-R**
- Weight: 112 lbs (51 kg)

#### Outlet:

12" (305mm) floor mounted to waste outlet.

#### Tank:

The tank is an integral part of the toilet with a free fitting lid and is suitable for domestic and light commercial applications. Push down side lever for full flush (1.28 gpf / 4.8 lpf) and pull up side lever for reduced flush (0.8 gpf / 3 lpf).







#### Water Control Valve:

Standard Bottom Entry – available as left hand inlet which incorporates a super quiet water control assembly. Internal overflow only.

#### Fixing:

The one piece toilet is fixed to the floor with corrosion resistant bolts and screws. Bowl is to be bonded to the floor with an approved silicon caulking.

### Features:

- |   |   |
|---|---|
|  Dual Flush        |  One Piece       |
|  Nano Glazed Bowl  |  Soft Close Seat |
|  Skirted Bowl      |  Rimless Design  |
|  Siphonic Flushing |   |

**Flush Volume:** 1.28/0.8 gpf (4.8/3 lpf)

## Technical Drawing & Certifications

FT240120W

All dimensions are in inches and millimetres and are subject to normal manufacturing variations.

Caroma pursues a policy of continuing improvement in design and performance of its products.

The right is therefore reserved to vary specifications without notice.

**Note:** All height dimensions to underside of closet bowl. Make allowance for bedding.

nano**gloss**®



ADA Compliant



Watersense Certified







Uniform Plumbing Code Certified



MAP Premium Certified



High Efficiency Toilet

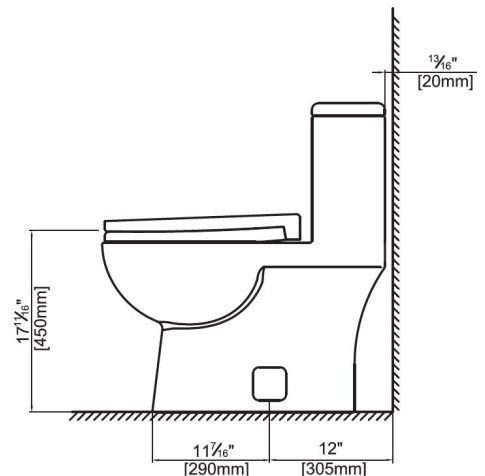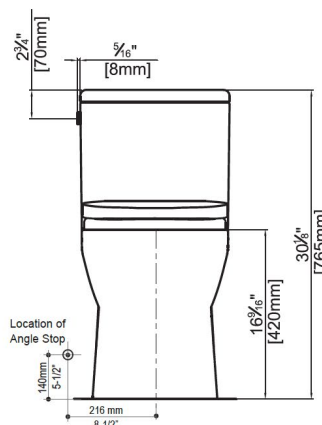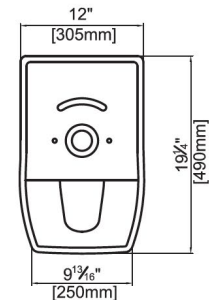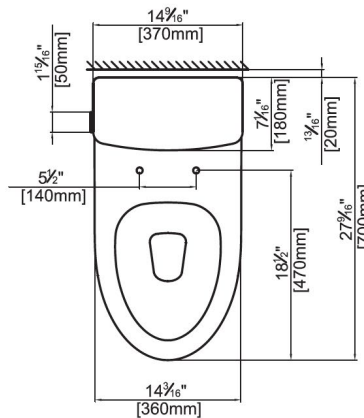

### Warranty:

fluid™ warrants its toilets to be free of defects in material and workmanship during normal residential or commercial use for the following periods:

- ➔ Vitreous china materials for a period of 5 years, (60 months) \*
- ➔ Mechanical components, such as tank internal components, handles and plastic components for a period of 3 years, (36 months)
- ➔ Seats included with toilets for a period of 2 years, (24 months).

### Important:

The Citi Siphonic One Piece Rimless Easy Height Elongated toilet will comply with the Americans with Disabilities Act when installed to Easy Height Standards for Accessible Design, Section 4.16 Water Closets. Further reference must be made to the relevant sections of Easy Height Standards For Accessible Design with current amendments to determine clear floor space, grab bar, and operation requirements.